

ORGANIC ELECTROLUMINESCENT DEVICE HAVING HIGH LUMINANCE EFFICIENCY

5

BACKGROUND OF THE INVENTION

(a) Field of the Invention

The present invention relates to an organic electroluminescent device having an excellent
10 luminescence property such as high luminance efficiency.

(b) Description of the Related Art

An organic electroluminescent device (which will hereinafter be called "organic EL device") is a light-
15 emitting device which makes use of the principle that when an electric field is applied, a fluorescent material emits light in response to the charge recombination of holes injected from an anode and electrons injected from a cathode.

20 After C.W. Tang et al. of Eastman Kodak Company reported a low-voltage-driven organic EL device using a double layered structure (C.W. Tang, S.A. Vanslyke, Applied Physics Letters, Vol. 51, 913 (1987) and the like), studies on an organic EL device have been briskly carried
25 out. Tang et al. reported an organic EL device using

05737315-13400

tris(8-hydroxyquinolinol aluminum) in a light-emitting layer and a triphenyldiamine derivative in a hole-transporting layer. This stacked structure gives such advantages as an improvement in the injection efficiency of holes into the light-emitting layer; blocking of electrons injected from a cathode, which increase the efficiency of exciton production from charge recombination; and confine the excitons into the light-emitting layer. A double layered structure composed of a hole-injecting and transporting layer and an electron-transporting and light-emitting layer or a triple layered structure composed of a hole-injecting and transporting layer, a light-emitting layer and an electron-injecting and transporting layer is well known as an organic EL device. In order to increase the recombination efficiency of injected holes and electrons, various improvements in the device structure or fabrication process have been introduced to such multi-layered devices.

As a hole transporting material, triphenylamine derivatives and aromatic diamine derivatives such as 4,4',4''-tris(3-methylphenylphenylamino)-triphenylamine and N,N'-diphenyl-N,N'-bis(3-methylphenyl)-[1,1'-biphenyl]-4,4'-diamine which are star burst type compounds are well known (for example, JP-A-8(1996)-20771, JP-A-8(1996)-40995, JP-A-8(1996)-40997, JP-A-

8(1996)-53397, and JP-A-8(1996)-87122).

As an electron transporting material, oxadiazole derivatives, triazole derivatives and the like are well known.

5 Chelate complexes such as tris(8-quinolinolate)aluminum complex, coumarin derivatives, tetraphenylbutadiene derivatives, bisstyrylarylene derivatives, oxadiazole derivatives and the like are known as light emitting materials. Since various color
10 light in a visible region from blue to red are obtained from these light-emitting materials, there is increased expectation for industrialization of a full color organic EL device (refer to, e.g., JP-A-8(1996)-23965, JP-A-7(1995)-138561, and JP-A-3(1991)-200889).

15 Although the various organic EL devices with high brightness and long lifetime have been reported, these properties are not enough. The present inventors described the organic EL devices with the high brightness using the specified perylene compound or the specified
20 benzoperylene compound in JP-A-11(1999)-144869 and JP-A-11(1999)-185961.

However, sufficient performances are not obtained for some of the perylene compounds and the benzoperylene compounds because of the aggregation of
25 compound molecules. Other compounds used in organic

004727-6TE/60

EL devices also form molecular aggregation which causes concentration quenching in the case of a mixture with high concentration and the solid containing the compounds singly, and the concentration quenching
5 reduced brightness of the devices in many cases.

SUMMARY OF THE INVENTION


It is therefore an object of the present invention to provide an organic EL devices having high luminance by
10 suppressing the concentration quenching.

The inventors found that an organic EL device which includes a specific perylene derivative or a benzoperylene derivative having substituents with large steric hindrance suppressing the aggregation of the
15 molecules has higher luminance. The inventors also found that the above compounds have good carrier transporting property, and an organic EL device including a hole transporting layer composed of above compounds, an organic EL device including an electron
20 transporting layer composed of above compounds and an organic EL device including a thin film composed of above compound and other hole transporting or electron transporting materials provide light-emission with a higher brightness than that of conventional organic EL
25 devices, thereby leading to completion of the present


09737319-124400

invention..

Thus, the present invention provides an organic electroluminescent (EL) device including an anode, a cathode, and one or more organic thin-film layers including a light-emitting layer sandwiched between the anode and the cathode, the organic thin-film layers including, either singly or as a mixture, a perylene derivative represented by a general formula [1] or a benzoperylene derivative represented by a general formula [2] as follows:

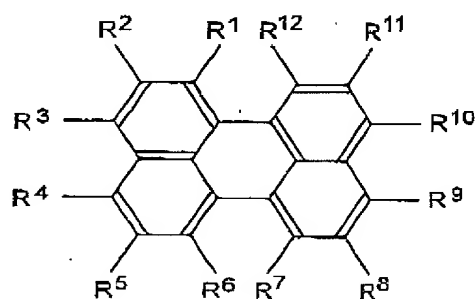

[1]

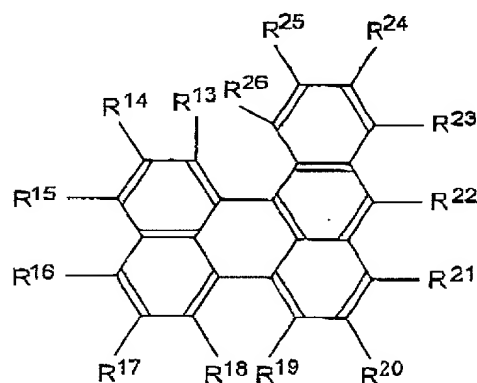

[2]

wherein each of R^1 to R^{12} and R^{13} to R^{26} each

independently represents hydrogen atom, halogen atom, hydroxyl group, substituted or non-substituted amino group, nitro group, cyano group, substituted or non-substituted alkyl group, substituted or non-substituted alkenyl group, substituted or non-substituted styryl group, substituted or non-substituted cycloalkyl group, substituted or non-substituted alkoxy group, substituted or non-substituted aromatic hydrocarbon group, substituted or non-substituted aromatic heterocyclic group, substituted or non-substituted aralkyl group or substituted or non-substituted aryloxy group; any two of R^1 to R^{12} or R^{13} to R^{26} may form a ring; and at least one of R^1 to R^{12} and at least one of R^{13} to R^{26} are diarylamino groups represented by $-NAr^1Ar^2$ (each of Ar^1 and Ar^2 represents substituted or non-substituted aromatic hydrocarbon group or substituted or non-substituted aromatic heterocyclic group), and at least one of R^1 to R^{12} and at least one of R^{13} to R^{26} other than the diarylamino group is a substituent with steric hindrance for suppressing aggregation of molecules.

It is preferable that at least one of Ar^1 and Ar^2 has a styryl group as a substituent.

It is preferable that the substituent with steric hindrance included in the general formula [1] is the substituted or non-substituted alkyl group, the

substituted or non-substituted cycloalkyl group, the substituted or non-substituted alkoxy group, the substituted or non-substituted aromatic hydrocarbon group, the substituted or non-substituted aromatic
5 heterocyclic group, the substituted or non-substituted aralkyl group or the substituted or non-substituted aryloxy group.

In accordance with the present invention, the organic EL device including the compound represented by
10 the general formula [1] or [2] as the component material of the organic thin film has higher luminance than that of a conventional organic EL device.

The above and other objects, features and advantages of the present invention will be more
15 apparent from the following description.

BRIEF DESCRIPTION OF DRAWINGS

Fig.1 is a cross sectional view showing an organic EL device in accordance with a first embodiment of the
20 present invention.

Fig.2 is a cross sectional view showing an organic EL device of a second embodiment.

Fig.3 is a cross sectional view showing an organic EL device of a third embodiment.

25 Fig.4 is a cross sectional view showing an organic

EL device of a fourth embodiment.

PREFERRED EMBODIMENTS OF THE INVENTION

Now, the present invention is more specifically
5 described.

A compound used in the present invention is that
having a structure represented by the general formula [1]
or [2].

Each of R^1 to R^{12} and R^{13} to R^{26} in the general
10 formulae [1] and [2] independently represents hydrogen
atom, halogen atom, hydroxyl group, substituted or non-
substituted amino group, nitro group, cyano group,
substituted or non-substituted alkyl group, substituted or
non-substituted alkenyl group, substituted or non-
15 substituted cycloalkyl group, substituted or non-
substituted alkoxy group, substituted or non-substituted
aromatic hydrocarbon group, substituted or non-
substituted aromatic heterocyclic group, substituted or
non-substituted aralkyl group, substituted or non-
20 substituted aryloxy group, substituted or non-substituted
alkoxycarbonyl group, or a carboxyl group, wherein any
two of R^1 to R^{12} or any two of R^{13} to R^{26} may form a ring;
and at least one of R^1 to R^{12} and at least one of R^{13} to R^{26}
are diarylamino groups represented by $-NAr^1Ar^2$ (each of
25 Ar^1 and Ar^2 represents substituted or non-substituted

004121 61E2E60

aromatic hydrocarbon group or substituted or non-substituted aromatic heterocyclic group).

In the above formulae [1] and [2], at least one of Ar^1 and Ar^2 may include substituted or non-substituted styryl group as a substituent.

At least one of R^1 to R^{12} and at least one of R^{13} to R^{26} other than the diarylamino group are substituents with large steric hindrance for suppressing aggregation of molecules.

The halogen atom includes fluorine atom, chlorine atom, bromine atom and iodine atom.

The substituted or non-substituted amino group is expressed by $-NX_1X_2$, wherein each of given X_1 and X_2 independently represents hydrogen atom, methyl group, ethyl group, propyl group, isopropyl group, n-butyl group, s-butyl group, isobutyl group, t-butyl group, n-pentyl group, n-hexyl group, n-heptyl group, n-octyl group, hydroxymethyl group, 1-hydroxyethyl group, 2-hydroxyethyl group, 2-hydroxyisobutyl group, 1,2-dihydroxyethyl group, 1,3-dihydroxyisopropyl group, 2,3-dihydroxy-t-butyl group, 1,2,3-trihydroxypropyl group, chloromethyl group, 1-chloroethyl group, 2-chloroethyl group, 2-chloroisobutyl group, 1,2-dichloroethyl group, 1,3-dichloroisopropyl group, 2,3-dichloro-t-butyl group, 1,2,3-trichloropropyl group, bromomethyl group, 1-

bromoethyl group, 2-bromoethyl group, 2-bromoisobutyl group, 1,2-dibromoethyl group, 1,3-dibromoisopropyl group, 2,3-dibromo-t-butyl, 1,2,3-tribromopropyl group, iodomethyl group, 1-iodoethyl group, 2-iodoethyl group, 2-iodoisobutyl group, 1,2-diiodoethyl group, 1,3-diiodoisopropyl group, 2,3-diiodo-t-butyl group, 1,2,3-triiodopropyl group, aminomethyl group, 1-aminoethyl group, 2-aminoethyl group, 2-aminoisobutyl group, 1,2-diaminoethyl group, 1,3-diaminoisopropyl group, 2,3-diamino-t-butyl group, 1,2,3-triaminopropyl group, cyanomethyl group, 1-cyanoethyl group, 2-cyanoethyl group, 2-cyanoisobutyl group, 1,2-dicyanoethyl group, 1,3-dicyanoisopropyl group, 2,3-dicyano-t-butyl group, 1,2,3-tricyanopropyl group, nitromethyl group, 1-nitroethyl group, 2-nitroethyl group, 2-nitroisobutyl group, 1,2-dinitroethyl group, 1,3-dinitroisopropyl group, 2,3-dinitro-t-butyl group, 1,2,3-trinitropropyl group, phenyl group, 1-naphthyl group, 2-naphthyl group, 1-anthryl group, 2-anthryl group, 9-anthryl group, 1-phenanthryl group, 2-phenanthryl group, 3-phenanthryl group, 4-phenanthryl group, 9-phenanthryl group, 1-naphthacenyl group, 2-naphthacenyl group, 9-naphthacenyl group, 4-styrylphenyl group, 1-pyrenyl group, 2-pyrenyl group, 4-pyrenyl group, 2-biphenylyl group, 3-biphenylyl group, 4-biphenylyl group, p-

terphenyl-4-yl group, p-terphenyl-3-yl group, p-terphenyl-2-yl group, m-terphenyl-4-yl group, m-terphenyl-3-yl group, m-terphenyl-2-yl group, o-tolyl group, m-tolyl group, p-tolyl group, p-t-butylphenyl group, 5 p-(2-phenylpropyl)phenyl group, 3-methyl-2-naphthyl group, 4-methyl-1-naphthyl group, 4-methyl-1-anthryl group, 4'-methylbiphenylyl group, 4''-t-butyl-p-terphenyl-4-yl group, 2-pyrrolyl group, 3-pyrrolyl group, pyrazinyl group, 2-pyridinyl group, 3-pyridinyl group, 4-pyridinyl group, 10 group, 2-indolyl group, 3-indolyl group, 4-indolyl group, 5-indolyl group, 6-indolyl group, 7-indolyl group, 1-isoindolyl group, 3-isoindolyl group, 4-isoindolyl group, 5-isoindolyl group, 6-isoindolyl group, 7-isoindolyl group, 2-furyl group, 3-furyl group, 2-benzofuranyl group, 3-15 benzofuranyl group, 4-benzofuranyl group, 5-benzofuranyl group, 6-benzofuranyl group, 7-benzofuranyl group, 1-isobenzofuranyl group, 3-isobenzofuranyl group, 4-isobenzofuranyl group, 5-isobenzofuranyl group, 6-isobenzofuranyl group, 7-isobenzofuranyl group, 20 2-quinolyl group, 3-quinolyl group, 4-quinolyl group, 5-quinolyl group, 6-quinolyl group, 7-quinolyl group, 8-quinolyl group, 1-isoquinolyl group, 3-isoquinolyl group, 4-isoquinolyl group, 5-isoquinolyl group, 6-isoquinolyl group, 7-isoquinolyl group, 8-25 isoquinolyl group, 2-quinoxaliny group, 5-quinoxaliny group

group, 6-quinoxaliny group, 1-carbazolyl group, 2-carbazolyl group, 3-carbazolyl group, 4-carbazolyl group, 1-phenanthridinyl group, 2-phenanthridinyl group, 3-phenanthridinyl group, 4-phenanthridinyl group, 6-phenanthridinyl group, 7-phenanthridinyl group, 8-phenanthridinyl group, 9-phenanthridinyl group, 10-phenanthridinyl group, 1-acridinyl group, 2-acridinyl group, 3-acridinyl group, 4-acridinyl group, 9-acridinyl group, 1,7-phenanthroline-2-yl group, 1,7-phenanthroline-3-yl group, 1,7-phenanthroline-4-yl group, 1,7-phenanthroline-5-yl group, 1,7-phenanthroline-6-yl group, 1,7-phenanthroline-8-yl group, 1,7-phenanthroline-9-yl group, 1,7-phenanthroline-10-yl group, 1,8-phenanthroline-2-yl group, 1,8-phenanthroline-3-yl group, 1,8-phenanthroline-4-yl group, 1,8-phenanthroline-5-yl group, 1,8-phenanthroline-6-yl group, 1,8-phenanthroline-7-yl group, 1,8-phenanthroline-9-yl group, 1,8-phenanthroline-10-yl group, 1,9-phenanthroline-2-yl group, 1,9-phenanthroline-3-yl group, 1,9-phenanthroline-4-yl group, 1,9-phenanthroline-5-yl group, 1,9-phenanthroline-6-yl group, 1,9-phenanthroline-7-yl group, 1,9-phenanthroline-8-yl group, 1,9-phenanthroline-10-yl group, 1,10-phenanthroline-2-yl group, 1,10-phenanthroline-3-yl group, 1,10-phenanthroline-4-yl

004727" 67E2E260

group, 1,10-phenanthroline-5-yl group, 2,9-phenanthroline-1-yl group, 2,9-phenanthroline-3-yl group, 2,9-phenanthroline-4-yl group, 2,9-phenanthroline-5-yl group, 2,9-phenanthroline-6-yl group, 2,9-phenanthroline-7-yl group, 2,9-phenanthroline-8-yl group, 2,9-phenanthroline-10-yl group, 2,8-phenanthroline-1-yl group, 2,8-phenanthroline-3-yl group, 2,8-phenanthroline-4-yl group, 2,8-phenanthroline-5-yl group, 2,8-phenanthroline-6-yl group, 2,8-phenanthroline-7-yl group, 2,8-phenanthroline-9-yl group, 2,8-phenanthroline-10-yl group, 2,7-phenanthroline-1-yl group, 2,7-phenanthroline-3-yl group, 2,7-phenanthroline-4-yl group, 2,7-phenanthroline-5-yl group, 2,7-phenanthroline-6-yl group, 2,7-phenanthroline-8-yl group, 2,7-phenanthroline-9-yl group, 2,7-phenanthroline-10-yl group, 1-phenazinyl group, 2-phenazinyl group, 1-phenothiazinyl group, 2-phenothiazinyl group, 3-phenothiazinyl group, 4-phenothiazinyl group, 1-phenoxazinyl group, 2-phenoxazinyl group, 3-phenoxazinyl group, 4-phenoxazinyl group, 2-oxazolyl group, 4-oxazolyl group, 5-oxazolyl group, 2-oxadiazolyl group, 5-oxadiazolyl group, 3-hurazanyl group, 2 thienyl group, 3-thienyl group, 2-methylpyrrole-1-yl group, 2-methylpyrrole-3-yl group, 2-methylpyrrole-4-yl group, 2-methylpyrrole-5-yl

group, 3-methylpyrrole-1-yl group, 3-methylpyrrole-2-yl group, 3-methylpyrrole-4-yl group, 3-methylpyrrole-5-yl group, 2-t-butylpyrrole-4-yl group, 3-(2-phenylpropyl)pyrrole-1-yl group, 2-methyl-1-indolyl group, 4-methyl-1-indolyl group, 2-methyl-3-indolyl group, 4-methyl-3-indolyl group, 2-t-butyl-1-indolyl group, 4-t-butyl-1-indolyl group, 2-t-butyl-3-indolyl group, and 4-t-butyl-3-indolyl group.

Examples of the substituted or non-substituted alkyl group include methyl group, ethyl group, propyl group, isopropyl group, n-butyl, s-butyl, isobutyl group, t-butyl group, n-pentyl group, n-hexyl group, n-heptyl group, n-octyl group, hydroxymethyl group, 1-hydroxyethyl group, 2-hydroxyethyl group, 2-hydroxyisobutyl group, 1,2-dihydroxyethyl group, 1,3-hydroxyisopropyl group, 2,3-dihydroxy-t-butyl group, 1,2,3-trihydroxypropyl group, chloromethyl group, 1-chloroethyl group, 2-chloroethyl group, 2-chloroisobutyl group, 1,2-chloroethyl group, 1,3-dichloroisopropyl group, 2,3-dichloro-t-butyl group, 1,2,3-trichloropropyl group, bromomethyl group, 1-bromoethyl group, 2-bromoethyl group, 2-bromoisobutyl group, 1,2-dibromoethyl group, 1,3-dibromoisopropyl group, 2,3-dibromo-t-butyl group, 1,2,3-tribromopropyl group, iodomethyl group, 1-iodoethyl group, 2-iodoethyl group, 2-iodoisobutyl group,

1,2-diiodoethyl group, 1,3-diiodoisopropyl group, 2,3-diiodo-t-butyl, 1,2,3-triiodopropyl group, aminomethyl group, 1-aminoethyl group, 2-aminoethyl group, 2-aminoisobutyl group, 1, 2-diaminoethyl group, 1,3-diaminoisopropyl group, 2,3-diamino-t-butyl group, 1,2,3-triaminopropyl group, cyanomethyl group, 1-cyanoethyl group, 2-cyanoethyl group, 2-cyanoisobutyl group, 1,2-dicyanoethyl group, 1,3-dicyanoisopropyl group, 2,3-dicyano-t-butyl group, 1,2,3-tricyanopropyl group, nitromethyl group, 1-nitroethyl group, 2-nitroethyl group, 2-nitroisobutyl group, 1,2-dinitroethyl group, 1,3-dinitroisopropyl group, 2,3-dinitro-t-butyl group, and 1,2,3-trinitropropyl group.

Examples of the substituted or non-substituted alkenyl group include vinyl group, allyl group, 1-butenyl group, 2-butenyl group, 3-butenyl group, 1,3-butanedieryl group, 1-methylvinyl group, styryl group, 2,2-diphenylvinyl group, 1,2-diphenylvinyl group, 1-methylallyl group, 1,1-dimethylallyl group, 2-methylallyl group, 1-phenylallyl group, 2-phenylallyl group, 3-phenylallyl group, 3,3-diphenylallyl group, 1,2-dimethylallyl group, 1-phenyl-1-butenyl group and 3-phenyl-1-butenyl group.

Examples of the substituted or non-substituted cycloalkyl group include cyclopropyl group, cyclobutyl

004427 67E7E760

group, cyclopentyl group, cyclohexyl group, 4-methylcyclohexyl group, 1-adamantyl group and 2-adamantyl group.

Examples of the substituted or non-substituted alkoxy group include groups represented by -OY wherein Y may be methyl group, ethyl group, propyl group, isopropyl group, n-butyl group, s-butyl group, isobutyl group, t-butyl group, n-pentyl group, n-hexyl group, n-heptyl group, n-octyl group, hydroxymethyl group, 1-hydroxyethyl group, 2-hydroxyethyl group, 2-hydroxyisobutyl group, 1,2-dihydroxyethyl group, 1,3-dihydroxyisopropyl group, 2,3-dihydroxy-t-butyl group, 1,2,3-trihydroxypropyl group, chloromethyl group, 1-chloroethyl group, 2-chloroethyl group, 2-chloroisobutyl group, 1,2-chloroethyl group, 1,3-dichloroisopropyl group, 2,3-dichloro-t-butyl group, 1,2,3-trichloropropyl group, bromomethyl group, 1-bromoethyl group, 2-bromoethyl group, 2-bromoisobutyl group, 1,2-dibromoethyl group, 1,3-dibromoisopropyl group, 2,3-dibromo-t-butyl group, 1,2,3-tribromopropyl group, iodomethyl group, 1-iodoethyl group, 2-iodoethyl group, 2-iodoisobutyl group, 1,2-diiodoethyl group, 1,3-diiodo isopropyl group, 2, 3-diiodo-t-butyl group, 1,2,3-triiodopropyl group, aminomethyl group, 1-aminoethyl group, 2-aminoethyl group, 2-aminoisobutyl group, 1,2-diaminoethyl group,

1,3-diaminoisopropyl group, 2,3-diamino-t-butyl group,
1,2,3-triaminopropyl group, cyanomethyl group, 1-
cyanoethyl group, 2-cyanoethyl group, 2-cyanoisobutyl
group, 1,2-dicyanoethyl group, 1,3-dicyanoisopropyl
5 group, 2,3-dicyano-t-butyl group, 1,2,3-tricyanopropyl
group, nitromethyl group, 1-nitroethyl group, 2-
nitroethyl group, 2-nitroisobutyl group, 1,2-dinitroethyl
group, 1,3-dinitroisopropyl group, 2,3-dinitro-t-butyl
group, 1,2,3-trinitropropyl group, cyclopropyl group,
10 cyclobutyl group, cyclopentyl group, cyclohexyl group, 4-
methylcyclohexyl group, 1-adamantyl group and 2-
adamantyl group.

Examples of the substituted or non-substituted
aromatic hydrocarbon group include phenyl group, 1-
15 naphthyl group, 2-naphthyl group, 1-anthryl group, 2-
anthryl group, 9-anthryl group, 1-phenanthryl group, 2-
phenanthryl group, 3-phenanthryl group, 4-phenanthryl
group, 9-phenanthryl group, 1-naphthacenyl group, 2-
naphthacenyl group, 9-naphthacenyl group, 1-pyrenyl
20 group, 2-pyrenyl group, 4-pyrenyl group, 2-biphenylyl
group, 3-biphenylyl group, 4-biphenylyl group, p-
terphenyl-4-yl group, p-terphenyl-3-yl group, p-
terphenyl-2-yl group, m-terphenyl-4-yl group, m-
terphenyl-3-yl group, m-terphenyl-2-yl group, o-tolyl
25 group, m-tolyl group, p-tolyl group, p-t-butylphenyl group,

p-(2-phenylpropyl)phenyl group, 3-methyl-2-naphthyl group, 4-methyl-1-naphthyl group, 4-methyl-1-anthrill group, 4'-methylbiphenyl group and 4"-t-butyl-p-terphenyl-4-yl group.

- 5 Examples of the substituted or non-substituted aromatic heterocyclic group include 1-pyrrolyl group, 2-pyrrolyl group, 3-pyrrolyl group, pyrazinyl group, 2-pyridinyl group, 3-pyridinyl group, 4-pyridinyl group, 1-indolyl group, 2-indolyl group, 3-indolyl group, 4-indolyl group, 5-indolyl group, 6-indolyl group, 7-indolyl group, 10 1-isoindolyl group, 2-isoindolyl group, 3-isoindolyl group, 4-isoindolyl group, 5-isoindolyl group, 6-isoindolyl group, 7-isoindolyl group, 2-furyl group, 3-furyl group, 2-benzofuranyl group, 3-benzofuranyl group, 4-benzofuranyl group, 5-benzofuranyl group, 6-benzofuranyl group, 7-benzofuranyl group, 1-isobenzofuranyl group, 3-isobenzofuranyl group, 4-isobenzofuranyl group, 5-isobenzofuranyl group, 6-isobenzofuranyl group, 7-isobenzofuranyl group, 2-quinolyl group, 3-quinolyl group, 4-quinolyl group, 5-quinolyl group, 6-quinolyl group, 7-quinolyl group, 8-quinolyl group, 1-isoquinolyl group, 3-isoquinolyl group, 4-isoquinolyl group, 5-isoquinolyl group, 6-isoquinolyl group, 7-isoquinolyl group, 8-isoquinolyl group, 2-quinoxaliny group, 5-quinoxaliny group, 6-quinoxaliny
- 15 20 25

group, 1-carbazolyl group, 2-carbazolyl group, 3-carbazolyl group, 4-carbazolyl group, 9-carbazolyl group, 1-phenanthridinyl group, 2-phenanthridinyl group, 3-phenanthridinyl group, 4-phenanthridinyl group, 6-phenanthridinyl group, 7-phenanthridinyl group, 8-phenanthridinyl group, 9-phenanthridinyl group, 10-phenanthridinyl group, 1-acridinyl group, 2-acridinyl group, 3-acridinyl group, 4-acridinyl group, 9-acridinyl group, 1,7-phenanthroline-2-yl group, 1,7-phenanthroline-3-yl group, 1,7-phenanthroline-4-yl group, 1,7-phenanthroline-5-yl group, 1,7-phenanthroline-6-yl group, 1,7-phenanthroline-8-yl group, 1,7-phenanthroline-9-yl group, 1,7-phenanthroline-10-yl group, 1,8-phenanthroline-2-yl group, 1,8-phenanthroline-3-yl group, 1,8-phenanthroline-4-yl group, 1,8-phenanthroline-5-yl group, 1,8-phenanthroline-6-yl group, 1,8-phenanthroline-7-yl group, 1,8-phenanthroline-9-yl group, 1,8-phenanthroline-10-yl group, 1,9-phenanthroline-2-yl group, 1,9-phenanthroline-3-yl group, 1,9-phenanthroline-4-yl group, 1,9-phenanthroline-5-yl group, 1,9-phenanthroline-6-yl group, 1,9-phenanthroline-7-yl group, 1,9-phenanthroline-8-yl group, 1,9-phenanthroline-10-yl group, 1,10-phenanthroline-2-yl group, 1,10-phenanthroline-3-yl group, 1,10-phenanthroline-4-yl group, 1,10-phenanthroline-5-yl

group, 2,9-phenanthroline-1-yl group, 2,9-phenanthroline-3-yl group, 2,9-phenanthroline-4-yl group, 2,9-phenanthroline-5-yl group, 2,9-phenanthroline-6-yl group, 2,9-phenanthroline-7-yl group, 2,9-phenanthroline-8-yl group, 2,9-phenanthroline-10-yl group, 2,8-phenanthroline-1-yl group, 2,8-phenanthroline-3-yl group, 2,8-phenanthroline-4-yl group, 2,8-phenanthroline-5-yl group, 2,8-phenanthroline-6-yl group, 2,8-phenanthroline-7-yl group, 2,8-phenanthroline-9-yl group, 2,8-phenanthroline-10-yl group, 2,7-phenanthroline-1-yl group, 2,7-phenanthroline-3-yl group, 2,7-phenanthroline-4-yl group, 2,7-phenanthroline-5-yl group, 2,7-phenanthroline-6-yl group, 2,7-phenanthroline-8-yl group, 2,7-phenanthroline-9-yl group, 2,7-phenanthroline-10-yl group, 1-phenazinyl group, 2-phenazinyl group, 1-phenothiazinyl group, 2-phenothiazinyl group, 3-phenothiazinyl group, 4-phenothiazinyl group, 10-phenothiazinyl group, 1-phenoxazinyl group, 2-phenoxazinyl group, 3-phenoxazinyl group, 4-phenoxazinyl group, 10-phenoxazinyl group, 2-oxazolyl group, 4-oxazolyl group, 5-oxazolyl group, 2-oxadiazolyl group, 5-oxadiazolyl group, 3-furazanyl group, 2-thienyl group, 3-thienyl group, 2-methylpyrrole-1-yl group, 2-methylpyrrole-3-yl group, 2-methylpyrrole-4-yl group, 2-

methylpyrrole-5-yl group, 3-methylpyrrole-1-yl group, 3-methylpyrrole-2-yl group, 3-methylpyrrole-4-yl group, 3-methylpyrrole-5-yl group, 2-t-butylpyrrole-4-yl group, 3-(2-phenylpropyl)pyrrole-1-yl group, 2-methyl-1-indolyl group, 4-methyl-1-indolyl group, 2-methyl-3-indolyl group, 4-methyl-3-indolyl group, 2-t-butyl-1-indolyl group, 4-t-butyl-1-indolyl group, 2-t-butyl-3-indolyl group and 4-t-butyl-3-indolyl group.

Examples of the substituted or non-substituted aralkyl group include benzyl group, 1-phenylethyl group, 2-phenylethyl group, 1-phenylisopropyl group, 2-phenylisopropyl group, phenyl-t-butyl group, \square -naphthylmethyl group, 1- \square -naphthylethyl group, 2- \square -naphthylethyl group, 1- \square -naphthylisopropyl group, 2- \square -naphthylisopropyl group, \square -naphthylmethyl group, 1- \square -naphthylethyl group, 2- \square -naphthylmethyl group, 1- \square -naphthylisopropyl group, 2- \square -naphthylisopropyl group, 1-pyrrolylmethyl group, 2-(1-pyrrolyl)ethyl group, p-methylbenzyl group, m-methylbenzyl group, o-methylbenzyl group, p-chlorobenzyl group, m-chlorobenzyl group, o-chlorobenzyl group, p-bromobenzyl group, m-bromobenzyl group, o-bromobenzyl group, p-iodobenzyl group, m-iodobenzyl group, o-iodobenzyl group, p-hydroxybenzyl group, m-hydroxybenzyl group, o-hydroxybenzyl group, p-aminobenzyl group, m-

5 2-phenylisopropyl group.

The substituted or non-substituted aryloxy group is represented by -OZ, wherein Z may be phenyl group, 1-naphthyl group, 2-naphthyl group, 1-anthryl group, 2-anthryl group, 9-anthryl group, 1-phenanthryl group, 2-phenanthryl group, 3-phenanthryl group, 4-phenanthryl group, 9-phenanthryl group, 1-naphthacenyl group, 2-naphthacenyl group, 9-naphthacenyl group, 1-pyrenyl group, 2-pyrenyl group, 4-pyrenyl group, 2-biphenylyl group, 3-biphenylyl group, 4-biphenylyl group, p-terphenyl-4-yl group, p-terphenyl-3-yl group, p-terphenyl-2-yl group, m-terphenyl-4-yl group, m-terphenyl-3-yl group, m-terphenyl-2-yl group, o-tolyl group, m-tolyl group, p-tolyl group, p-t-butylphenyl group, p-(2-phenylpropyl)phenyl group, 3-methyl-2-naphthyl group, 4-methyl-1-naphthyl group, 4-methyl-1-anthryl group, 4'-methylbiphenylyl group, 4"-t-butyl-p-terphenyl-4-yl group, 2-pyrrolyl group, 3-pyrrolyl group, pyrazinyl group, 2-pyridinyl group, 3-pyridinyl group, 4-pyridinyl group, 2-indolyl group, 3-indolyl group, 4-indolyl group, 5-indolyl group, 6-indolyl group, 7-indolyl group, 1-

isoindolyl group, 3-isoindolyl group, 4-isoindolyl group, 5-
isoindolyl group, 6-isoindolyl group, 7-isoindolyl group, 2-
furyl group, 3-furyl group, 2-benzofuranyl group, 3-
benzofuranyl group, 4-benzofuranyl group, 5-
5 benzofuranyl group, 6-benzofuranyl group, 7-
benzofuranyl group, 1-isobenzofuranyl group, 3-
isobenzofuranyl group, 4-isobenzofuranyl group, 5-
isobenzofuranyl group, 6-isobenzofuranyl group, 7-
isobenzofuranyl group, 2-quinolyl group, 3-quinolyl group,
10 4-quinolyl group, 5-quinolyl group, 6-quinolyl group, 7-
quinolyl group, 8-quinolyl group, 1-isoquinolyl group, 3-
isoquinolyl group, 4-isoquinolyl group, 5-isoquinolyl
group, 6-isoquinolyl group, 7-isoquinolyl group, 8-
isoquinolyl group, 2-quinoxaliny group, 5-quinoxaliny
15 group, 6-quinoxaliny group, 1-carbazolyl group, 2-
carbazolyl group, 3-carbazolyl group, 4-carbazolyl group,
1-phenanthridinyl group, 2-phenanthridinyl group, 3-
phenanthridinyl group, 4-phenanthridinyl group, 6-
phenanthridinyl group, 7-phenanthridinyl group, 8-
20 phenanthridinyl group, 9-phenanthridinyl group, 10-
phenanthridinyl group, 1-acridinyl group, 2-acridinyl
group, 3-acridinyl group, 4-acridinyl group, 9-acridinyl
group, 1,7-phenanthroline-2-yl group, 1,7-
phenanthroline-3-yl group, 1,7-phenanthroline-4-yl group,
25 1,7-phenanthroline-5-yl group, 1,7-phenanthroline-6-yl

00737319-121400

group, 1,7-phenanthroline-8-yl group, 1,7-phenanthroline-9-yl group, 1,7-phenanthroline-10-yl group, 1,8-phenanthroline-2-yl group, 1,8-phenanthroline-3-yl group, 1,8-phenanthroline-4-yl group, 5 1,8-phenanthroline-5-yl group, 1,8-phenanthroline-6-yl group, 1,8-phenanthroline-7-yl group, 1,8-phenanthroline-9-yl group, 1, 8-phenanthroline-10-yl group, 1,9-phenanthroline-2-yl group, 1,9-phenanthroline-3-yl group, 1,9-phenanthroline-4-yl group, 10 1,9-phenanthroline-5-yl group, 1,9-phenanthroline-6-yl group, 1,9-phenanthroline-7-yl group, 1,9-phenanthroline-8-yl group, 1,9-phenanthroline-10-yl group, 1,10-phenanthroline-2-yl group, 1,10-phenanthroline-3-yl group, 1,10-phenanthroline-4-yl group, 15 group, 1,10-phenanthroline-5-yl group, 2,9-phenanthroline-1-yl group, 2,9-phenanthroline-3-yl group, 2,9-phenanthroline-4-yl group, 2,9-phenanthroline-5-yl group, 2,9-phenanthroline-6-yl group, 2,9-phenanthroline-7-yl group, 2,9-phenanthroline-8-yl group, 20 2,9-phenanthroline-10-yl group, 2,8-phenanthroline-1-yl group, 2,8-phenanthroline-3-yl group, 2,8-phenanthroline-4-yl group, 2,8-phenanthroline-5-yl group, 2,8-phenanthroline-6-yl group, 2,8-phenanthroline-7-yl group, 2,8-phenanthroline-9-yl group, 2,8-phenanthroline-10-yl group, 25 2,7-phenanthroline-1-yl

09737319-14400

group, 2,7-phenanthroline-3-yl group, 2,7-phenanthroline-4-yl group, 2,7-phenanthroline-5-yl group, 2,7-phenanthroline-6-yl group, 2,7-phenanthroline-8-yl group, 2,7-phenanthroline-9-yl group, 2,7-phenanthroline-10-yl group, 1-phenazinyl group, 2-phenazinyl group, 1-phenothiazinyl group, 2-phenothiazinyl group, 3-phenothiazinyl group, 4-phenothiazinyl group, 1-phenoxazinyl group, 2-phenoxazinyl group, 3-phenoxazinyl group, 4-phenoxazinyl group, 2-oxazolyl group, 4-oxazolyl group, 5-oxazolyl group, 2-oxadiazolyl group, 5-oxadiazolyl group, 3-furazanyl group, 2-thienyl group, 3-thienyl group, 2-methylpyrrole-1-yl group, 2-methylpyrrole-3-yl group, 2-methylpyrrole-4-yl group, 2-methylpyrrole-5-yl group, 3-methylpyrrole-1-yl group, 3-methylpyrrole-2-yl group, 3-methylpyrrole-4-yl group, 3-methylpyrrole-5-yl group, 2-t-butylpyrrole-4-yl group, 3-(2-phenylpropyl)pyrrole-1-yl group, 2-methyl-1-indolyl group, 4-methyl-1-indolyl group, 2-methyl-3-indolyl group, 4-methyl-3-indolyl group, 2-t-butyl-1-indolyl group, 4-t-butyl-1-indolyl group, 2-t-butyl-3-indolyl group and 4-t-butyl-3-indolyl group.

The substituted or non-substituted alkoxycarbonyl group is represented by -COOY, wherein Y may be methyl group, ethyl group, propyl group, isopropyl group, n-butyl

group, s-butyl group, isobutyl group, t-butyl group, n-pentyl group, n-hexyl group, n-heptyl group, n-octyl group, hydroxymethyl group, 1-hydroxyethyl group, 2-hydroxyethyl group, 2-hydroxyisobutyl group, 1,2-dihydroxyethyl group, 1,3-dihydroxyisopropyl group, 2,3-dihydroxy-t-butyl group, 1,2,3-trihydroxypropyl group, chloromethyl group, 1-chloroethyl group, 2-chloroethyl group, 2-chloroisobutyl group, 1,2-dichloroethyl group, 1,3-dichloroisopropyl group, 2,3-dichloro-t-butyl group, 1,2,3-trichloropropyl group, bromomethyl group, 1-bromoethyl group, 2-bromoethyl group, 2-bromoisobutyl group, 1,2-dibromoethyl group, 1,3-dibromoisopropyl group, 2,3-dibromo-t-butyl group, 1,2,3-tribromopropyl group, iodomethyl group, 1-iodoethyl group, 2-iodoethyl group, 2-iodoisobutyl group, 1,2-diiodoethyl group, 1,3-diiodoisopropyl group, 2, 3-diiodo-t-butyl group, 1,2,3-triiodopropyl group, aminomethyl group, 1-aminoethyl group, 2-aminoethyl group, 2-aminoisobutyl group, 1,2-diaminoethyl group, 1,3-diaminoisopropyl group, 2,3-diamino-t-butyl group, 1,2,3-triaminopropyl group, cyanomethyl group, 1-cyanoethyl group, 2-cyanoethyl group, 2-cyanoisobutyl group, 1,2-dicyanoethyl group, 1,3-dicyanoisopropyl group, 2,3-dicyano-t-butyl group, 1,2,3-tricyanopropyl group, nitromethyl group, 1-nitroethyl group, 2-nitroethyl group, 2-nitroisobutyl

group, 1,2-dinitroethyl group, 1,3-dinitroisopropyl group, 2,3-dinitro-t-butyl group and 1,2,3-trinitropropyl group.

Examples of the substituted or non-substituted styryl group include, in addition to styryl group and 2,2-diphenylvinyl group, substituted styryl group and substituted 2,2-diphenylvinyl group having, as a substituent, halogen atom, hydroxyl group, substituted or non-substituted diarylamino group expressed by -NAr³Ar⁴ (each of Ar³ and Ar⁴ represents substituted or non-substituted aryl group having 6 to 20 carbon atoms), nitro group, cyano group, the above-described substituted or non-substituted alkyl group, the above-described substituted or non-substituted alkenyl group, the above-described substituted or non-substituted cycloalkyl group, the above-described substituted or non-substituted alkoxy group, the above-described substituted or non-substituted aromatic hydrocarbon group, the above-described substituted or non-substituted aromatic heterocyclic group, the above-described substituted or non-substituted aralkyl group, the above-described substituted or non-substituted aryloxy group, the above-described substituted or non-substituted alkoxycarbonyl group, or the carboxyl group. Examples of the aryl group having 6 to 20 carbon atoms represented by the Ar³ and Ar⁴ include phenyl group, naphthyl group, anthryl group,

phenanthryl group, naphthacenyl group, and pyrenyl group. Examples of the substituent of the aryl group includes halogen atom, hydroxyl group, nitro group, cyano group, the above-described substituted or non-substituted alkyl group, the above-described substituted or non-substituted alkenyl group, the above-described substituted or non-substituted cycloalkyl group, the above-described substituted or non-substituted alkoxy group, the above-described substituted or non-substituted aromatic hydrocarbon group, the above-described substituted or non-substituted aromatic heterocyclic group, the above-described substituted or non-substituted aralkyl group, the above-described substituted or non-substituted aryloxy group, the above-described substituted or non-substituted alkoxycarbonyl group, and the carboxyl group.

Examples of a divalent group forming the ring using two of the R^1 to R^{12} or R^{13} to R^{26} include tertamethylene group, pentamethylene group, hexamethylene group, diphenylmethane-2,2'-diyl group, diphenylmethane-3,3'-diyl group, diphenylpropane-4,4'-diyl group and 1,3-butadiene-1,4-diyl group.

Any group can be used as the substituent with steric hindrance for suppressing the aggregation of the molecules so long as the group is bulky enough to prevent

the aggregation of the molecules. Examples thereof include the substituted or non-substituted alkyl group, the substituted or non-substituted cycloalkyl group, the substituted or non-substituted alkoxy group, the substituted or non-substituted aromatic hydrocarbon group, the substituted or non-substituted aromatic heterocyclic group, the substituted or non-substituted aralkyl group and the substituted or non-substituted aryloxy group. Concrete examples thereof include isopropyl group, t-butyl group, 2,3-dibromo-t-butyl group, 2,3-diiodo-t-butyl group, t-butoxy group, 2,3-dibromo-t-butoxy group, 2,3-diiodo-t-butoxy group, 2-methylbutane-2-yl group, 2-methylbutane-2-yloxy group, cyclopropyl group, cyclobutyl group, cyclopentyl group, cyclohexyl group, 4-methylcyclohexyl group, norbornane-1-yl group, norbornane-2-yl group, norbornane-7-yl group, norbornane-1-yloxy group, norbornane-2-yloxy group, norbornane-7-yloxy group, bornane-2-yl group, bornane-2-yloxy group, tricyclo[5.3.2.0^{4,9}]dodecane-1-yl group, tricyclo[5.3.2.0^{4,9}]dodecane-2-yl group, tricyclo[5.3.2.0^{4,9}]dodecane-3-yl group, tricyclo[5.3.2.0^{4,9}]dodecane-10-yl group, tricyclo[5.3.2.0^{4,9}]dodecane-11-yl group, tricyclo[5.3.2.0^{4,9}]dodecane-1-yloxy group, tricyclo[5.3.2.0^{4,9}]dodecane-2-yloxy group,


tricyclo[5.3.2.04,9]dodecane-3-yloxy group,
tricyclo[5.3.2.04,9]dodecane-10-yloxy group,
tricyclo[5.3.2.04,9]dodecane-11-yloxy group, p-cyclofanyl
group, 1-adamantyl group, 2-adamantyl group, 1-
5 adamantyloxy group, 2-adamantyloxy group, phenyl
group, tolyl group, 9-fluorenyl group, 2,2-dimethyl-1-
propyl group, cyclopropylmethyl group, cyclobutylmethyl
group, cyclopentylmethyl group, cyclohexylmethyl group,
4-methylcyclohexylmethyl group, norbornane-1-yl-methyl
10 group, norbornane-2-yl-methyl group, norbornane-7-yl-
methyl group, tricyclo[5.3.2.04,9]dodecane-1-yl-methyl
group, tricyclo[5.3.2.04,9]dodecane-2-yl-methyl group,
tricyclo[5.3.2.04,9]dodecane-3-yl-methyl group,
tricyclo[5.3.2.04,9]dodecane-10-yl-methyl group,
15 tricyclo[5.3.2.04,9]dodecane-11-yl-methyl group, p-
cyclofanemethyl group, 1-adamantylmethyl group, 2-
adamantylmethyl group, benzyl group, 4-methylbenzyl
group, 1-naphthyloxy group, 1-naphthylmethyl group, 9-
anthrylmethyl group, 9-anthryloxy group,
20 triphenylmethyl group, 2,2,2-triphenylethyl group, 9-
fluorenyl group, 9-fluorenyloxy group, 9,9'-
spirobifluorene-4-yl group, 9,9'-spirobifluorene-3-yl group,
9,9'-spirobifluorene-4-yl-methyl group, 9,9'-
spirobifluorene-3-yl-methyl group, 9,9'-spirobifluorene-4-
25 yloxy group, 9,9'-spirobifluorene-3-yloxy group, tris(2,2-

00422T"672260

dimethylpropyl)methyl group, tris(2,2-dimethylpropyl)methoxy group, 2,2,2-tris (2,2-dimethylpropyl)ethyl group, bicyclo[3,2,1]octane-1-yl group, bicyclo[3,2,1]octane-2-yl group, bicyclo[3,2,1]octane-3-yl group, bicyclo[3,2,1]octane-7-yl group, bicyclo[3,2,1]octane-8-yl group, bicyclo[3,2,1]octane-1-yloxy group, bicyclo[3,2,1]octane-2-yloxy group, bicyclo[3,2,1]octane-3-yloxy group, bicyclo[3,2,1]octane-7-yloxy group, bicyclo[3,2,1]octane-8-yloxy group, bicyclo[3,2,1]octane-1-yl-methyl group, bicyclo[3,2,1]octane-2-yl-methyl group, bicyclo[3,2,1]octane-3-yl-methyl group, bicyclo[3,2,1]octane-7-yl-methyl group and bicyclo[3,2,1]octane-8-yl-methyl group.


Although examples of the compounds represented by the general formulae [1] and [2] will be listed, the compounds usable in the present invention are not restricted thereto.

Examples of the compounds represented by the general formula [1] are as follows.

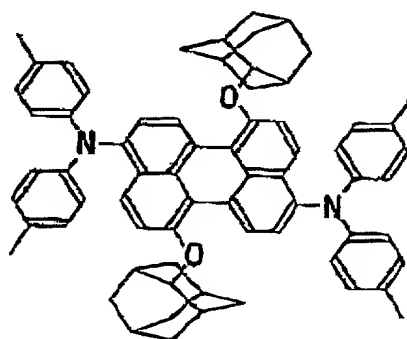


[3]


32

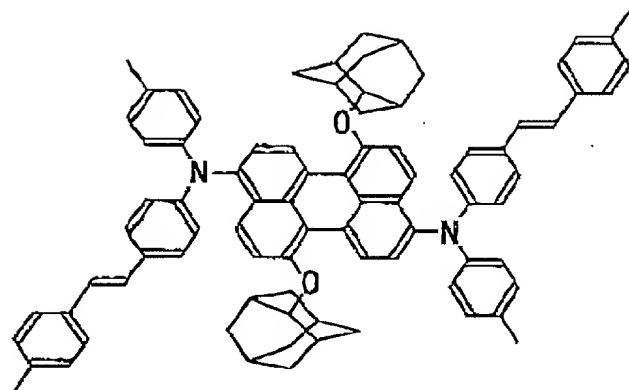

[4]

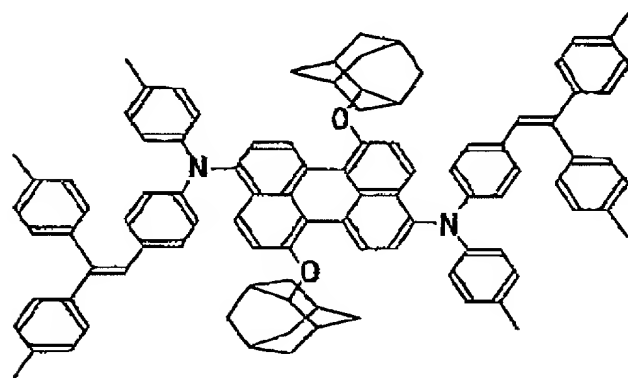


[5]

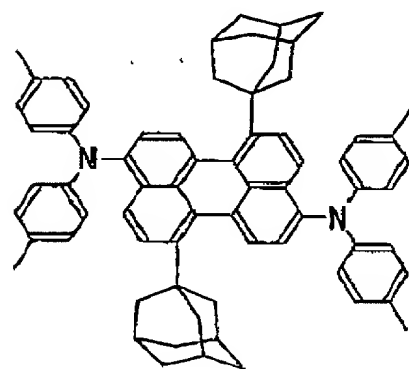


[6]

004727-676468


33

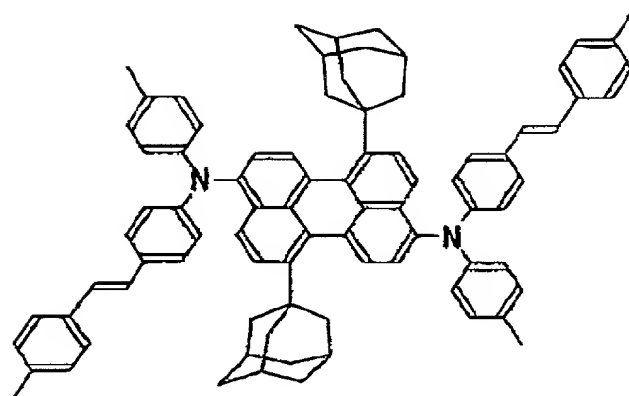

[7]

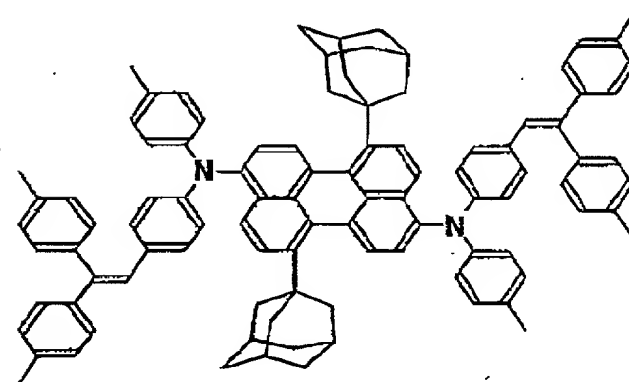


[8]

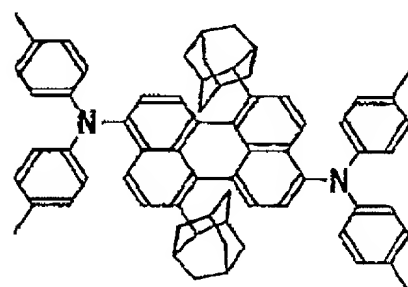


[9]

004727-67460


34

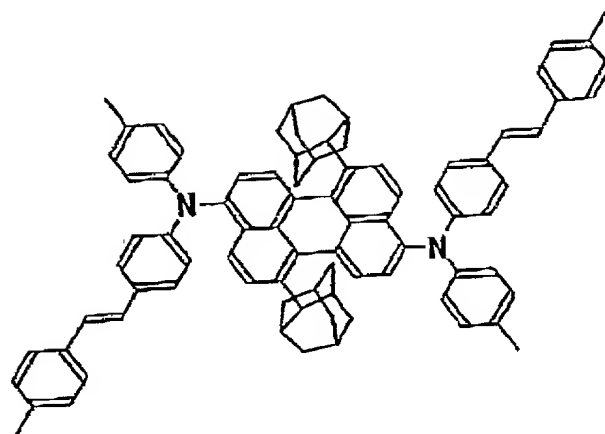

[10]

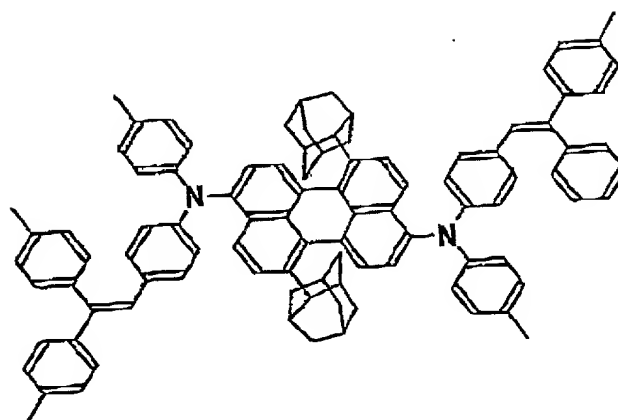


[11]

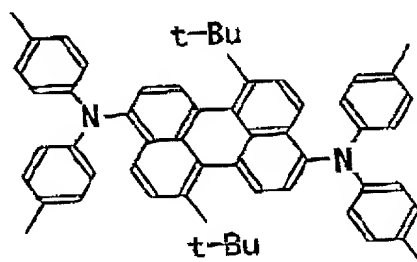


[12]


097739 4400 6766660

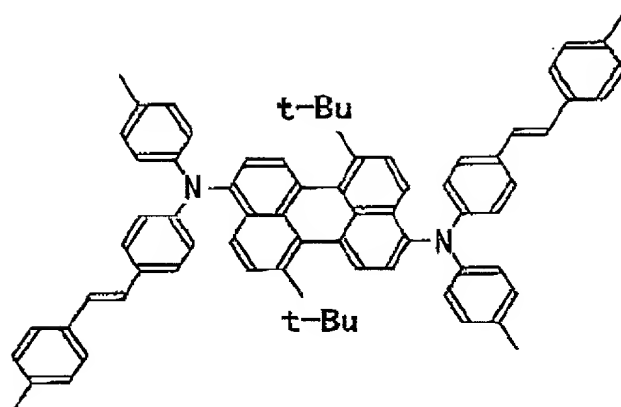


[13]

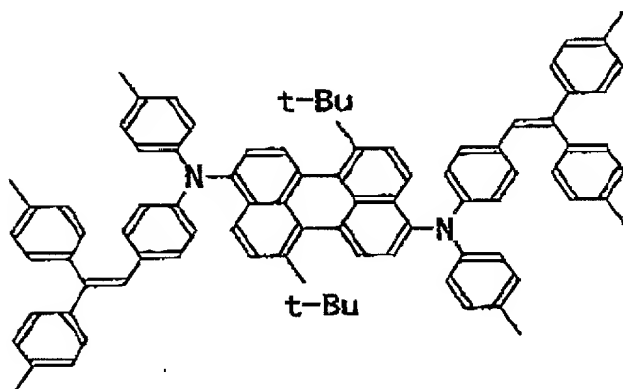


[14]

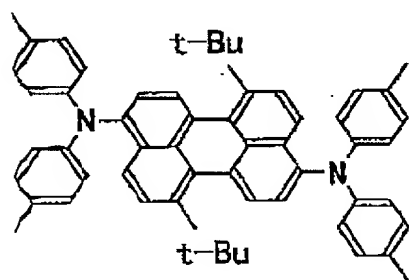


[15]

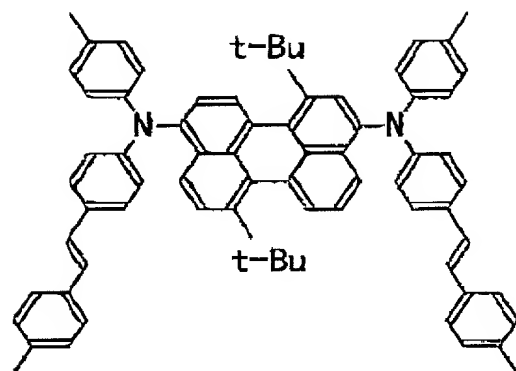

[16]

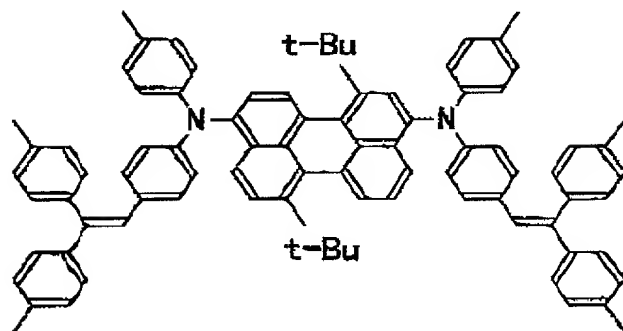


[17]

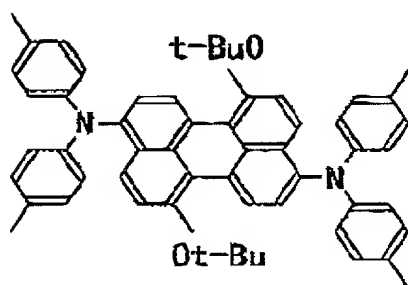


[18]


37

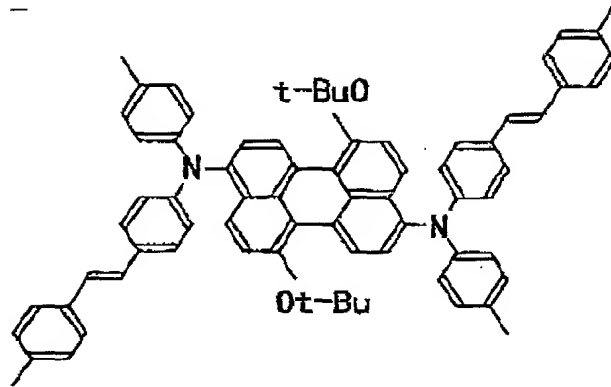

[19]

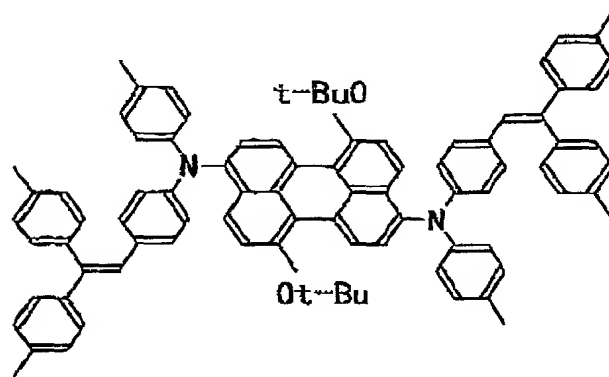


[20]

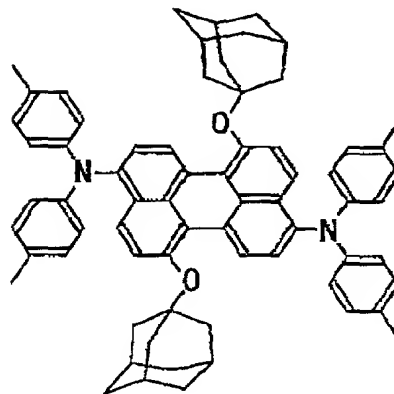


[21]

004427-6746460


38

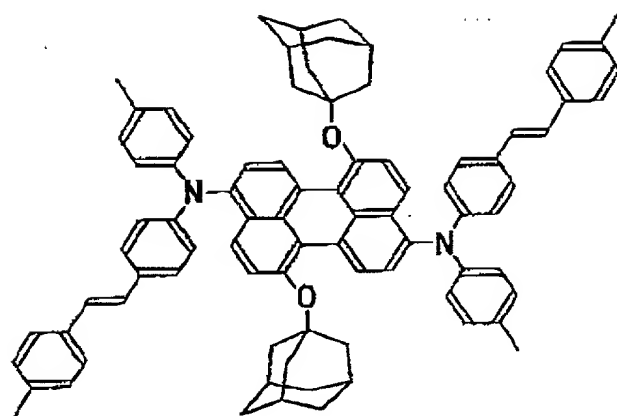

[22]

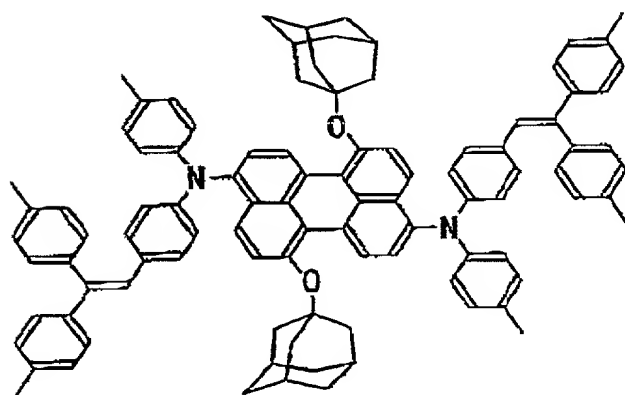


[23]

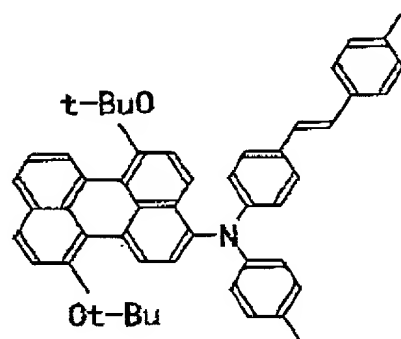


[24]

39




[25]

Examples of the compounds represented by the general formula [2] are as follows.




[26]

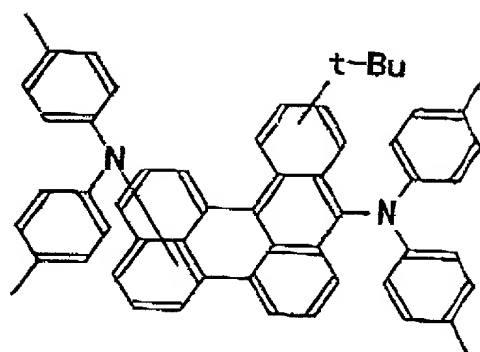


[27]

41

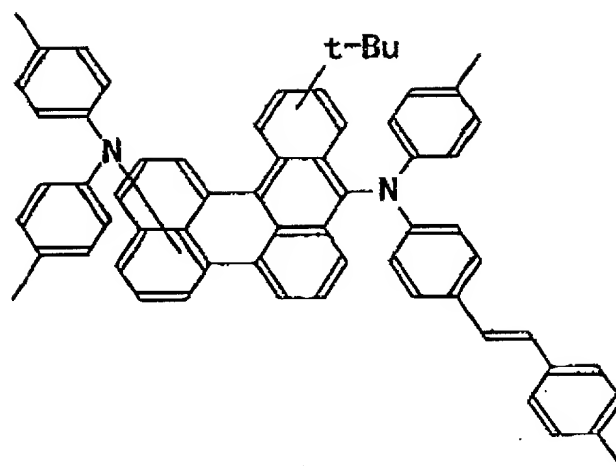


[30]




[31]


004727-67E260

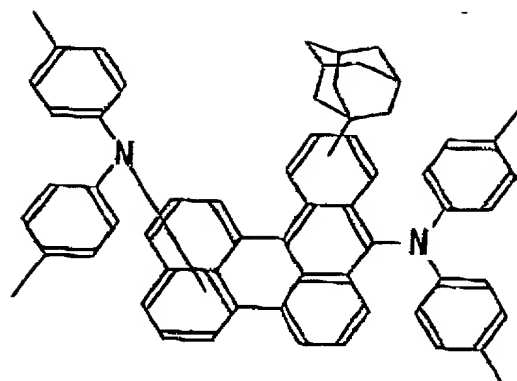

43

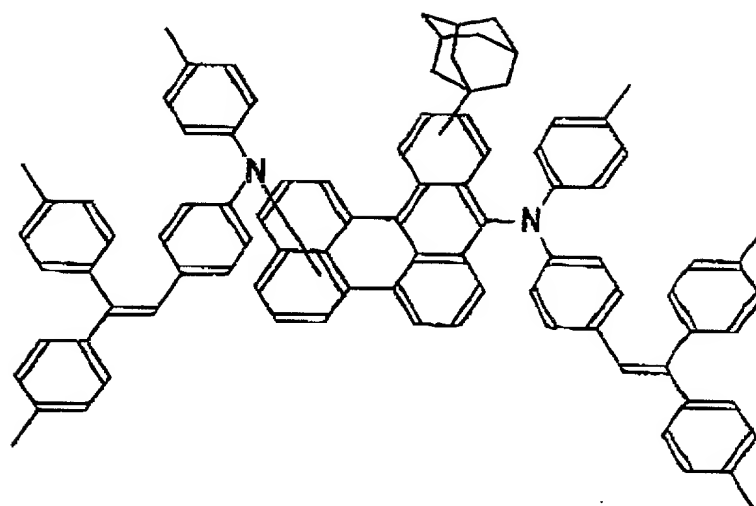


[34]

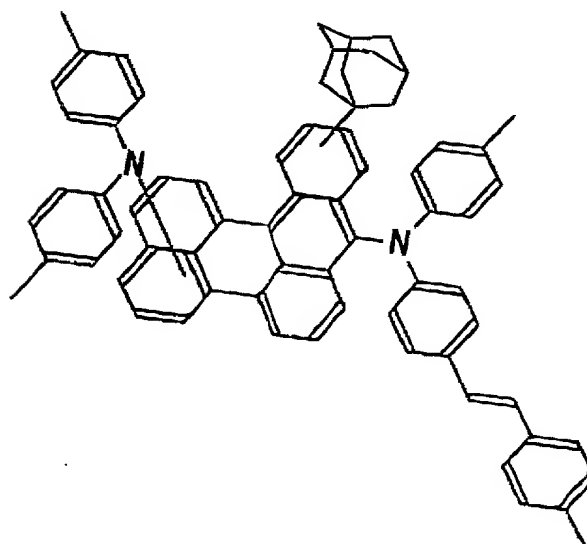


[35]


44

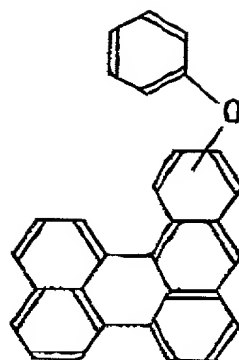


[36]

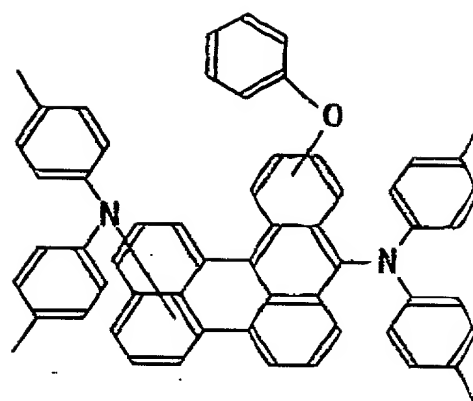

[37]


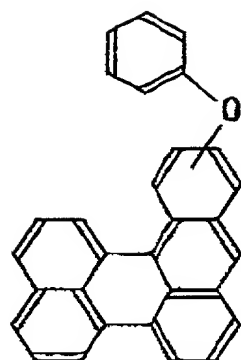


[36]

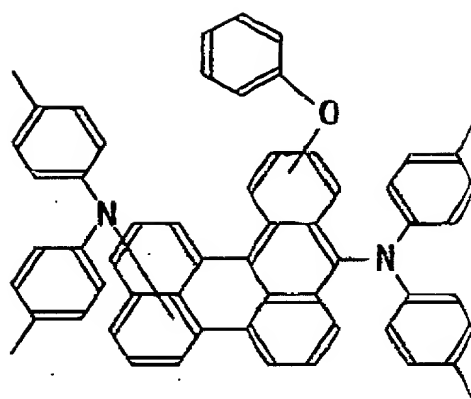


[37]

45

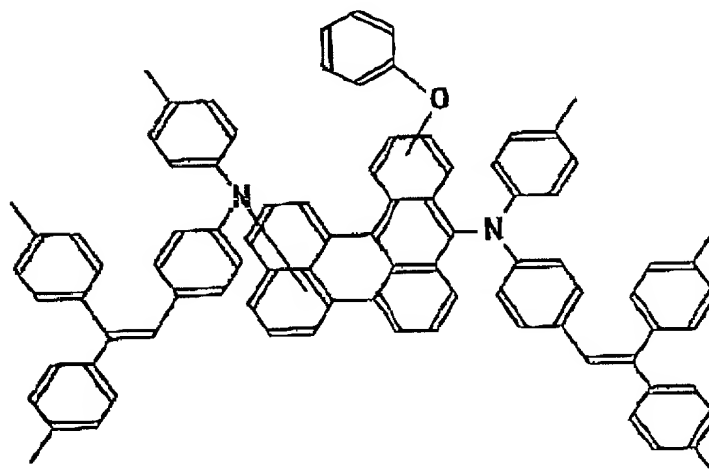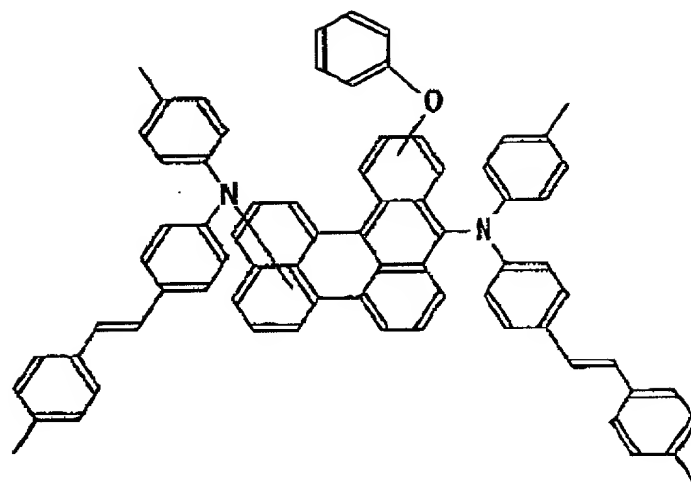


004727-67E260

46

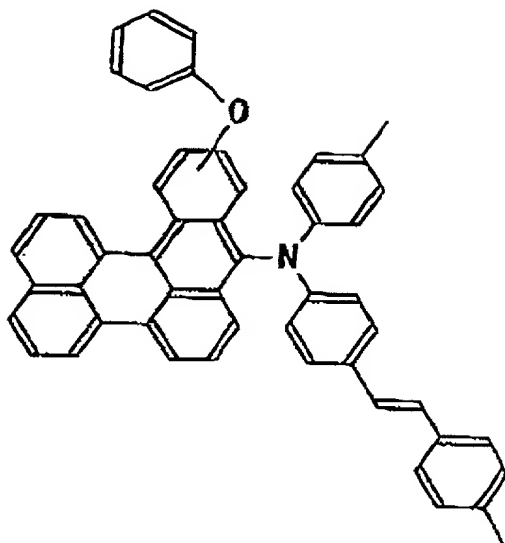


[40]

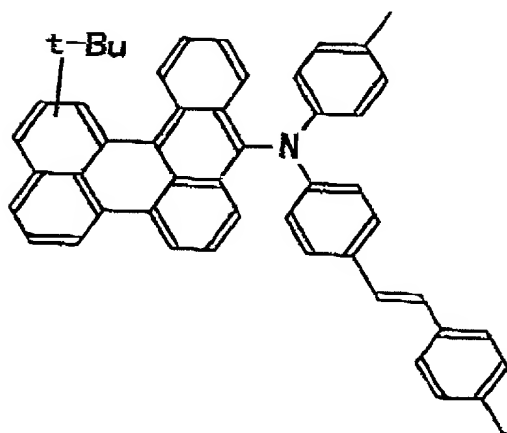


[41]

DocId: 6762460

47

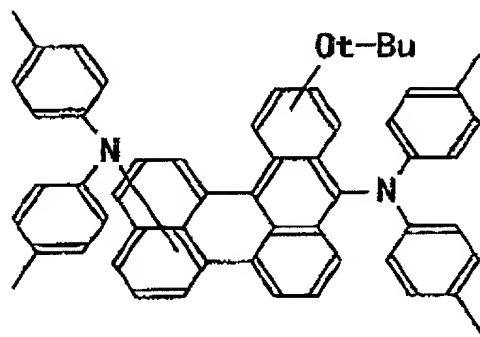


[42]

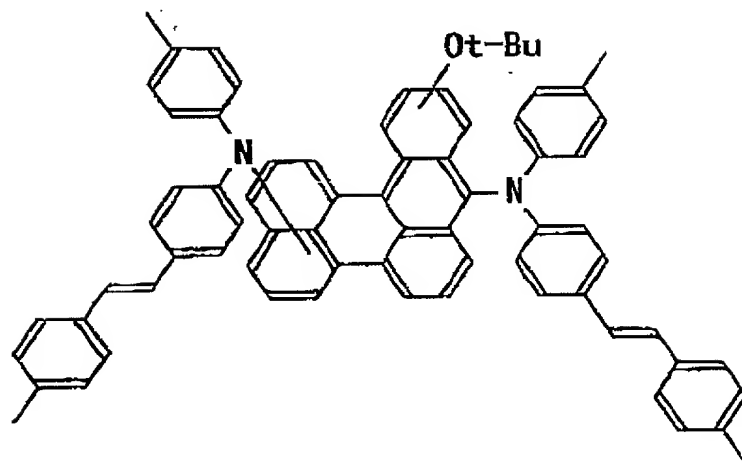


[43]

00427-574260

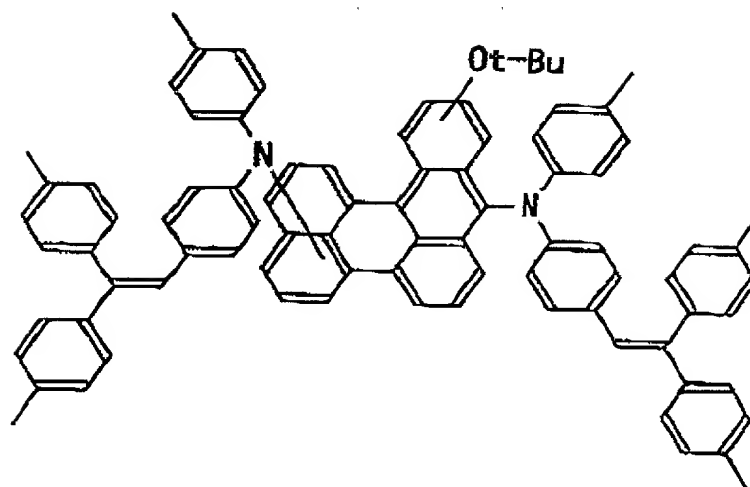


[44]

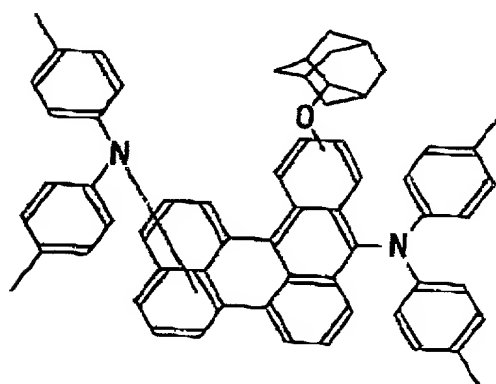


[45]

49

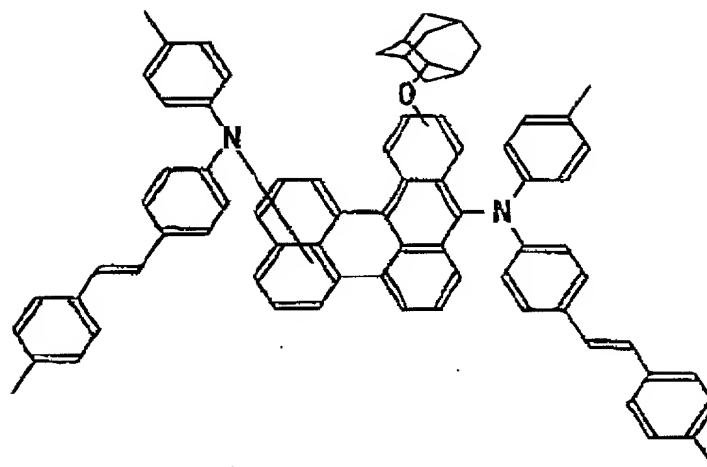


[46]

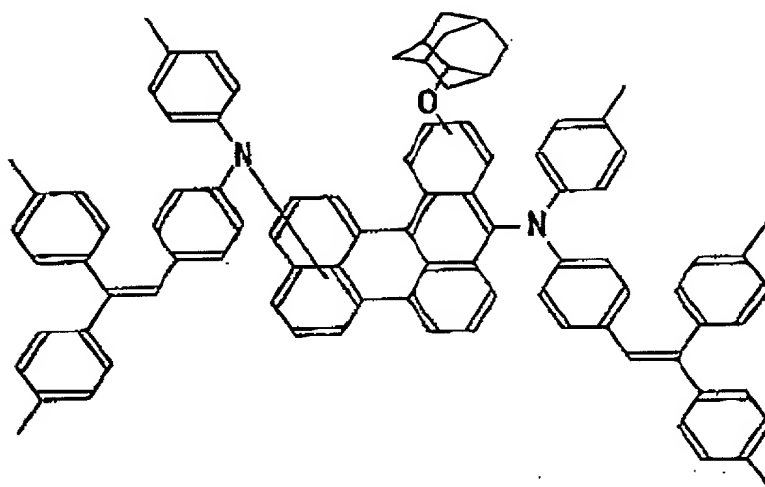


[47]

004737-6 F.E.E.60

50

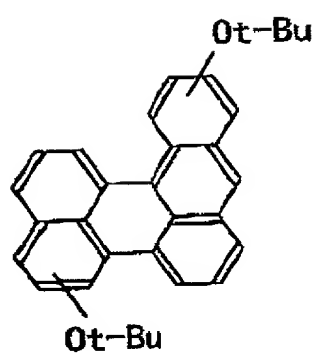



[48]

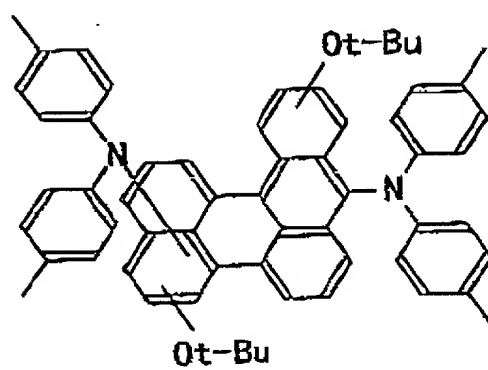

[49]

004227-67E60

51

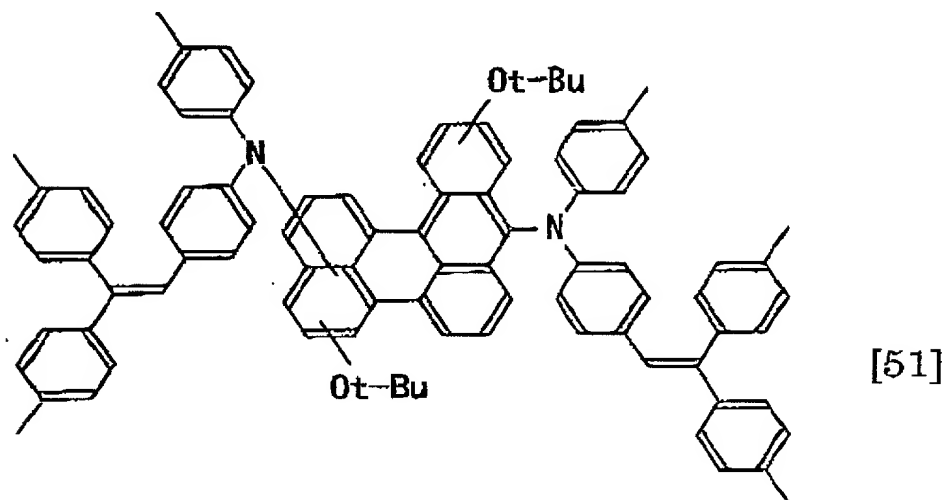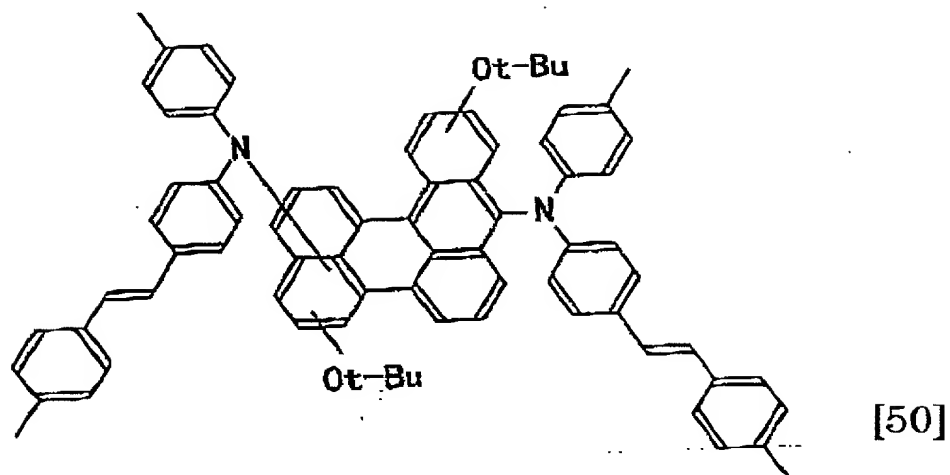

004727-5E2E260




00424 672260

The structure of the organic EL device of the present invention includes one or more organic thin-film layers between the electrodes, and examples thereof include that having an anode 12, a light-emitting layer 14 and a cathode 16 stacked in this turn on a glass substrate 11 as shown in Fig.1, that having the anode 12, a hole transporting layer 13, the light-emitting layer 14, an electron transporting layer 15 and the cathode 16 stacked in this turn on the glass substrate 11 as shown in Fig.2, that having the anode 12, the hole transporting layer 13, the light-emitting layer 14 and the cathode 16 stacked in this turn on the glass substrate 11 as shown in Fig.3 and that having the anode 12, the light-emitting layer 14, the electron transporting layer 15 and the cathode 16 stacked in this turn on the glass substrate 11 as shown in Fig.4.

The compound of the present invention may exist in any one of the organic thin-film layers, and may be doped in the other hole transporting material, light-emitting material and electron transporting material.


There are no particular limitation on the hole transporting material used for the hole transporting layer in the present invention, and any compound that is usually used as an hole transporting material can be used. Examples of such materials include, but not limited to,

triphenyldiamine derivatives such as bis[di(p-
tolyl)aminophenyl]-1,1-cyclohexane [52], N, N'-diphenyl-
N,N'-bis(3-methylphenyl)-1,1'-biphenyl- 4,4'-diamine [53]
and N,N'-diphenyl-N,N'- bis(1-naphthyl)-1,1'-biphenyl-
5 4,4'-diamine [54], and star burst type molecules [55 to
57].

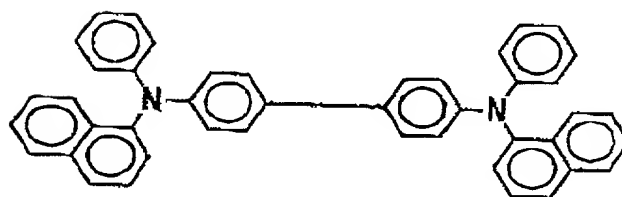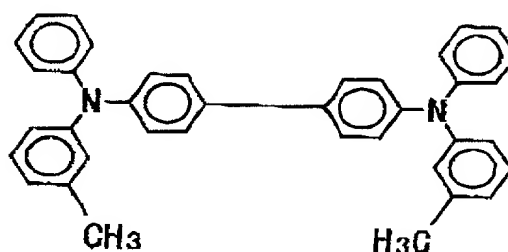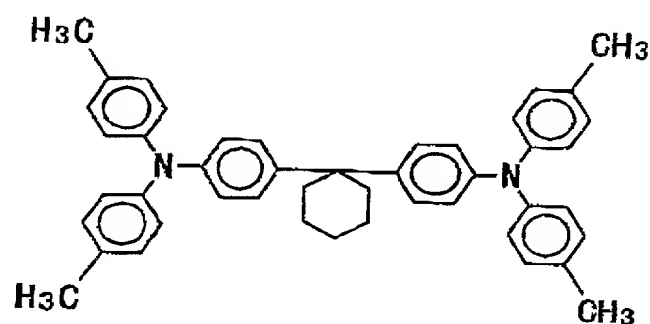


54

5

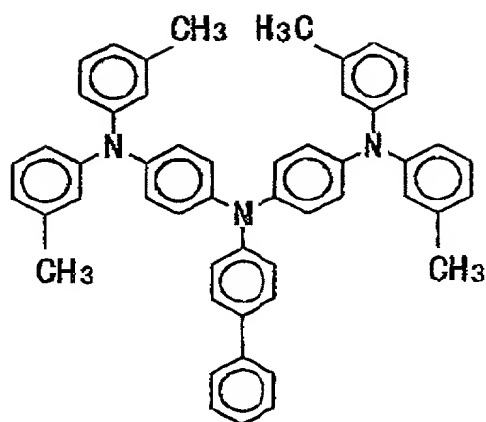

[55]


10

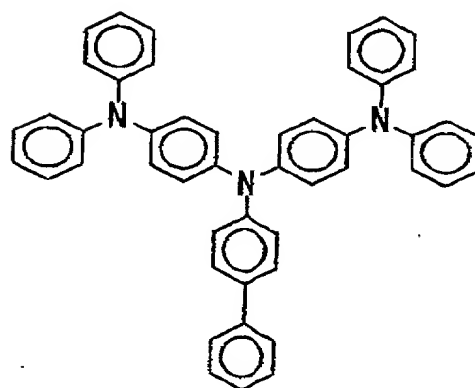

[56]

15

20



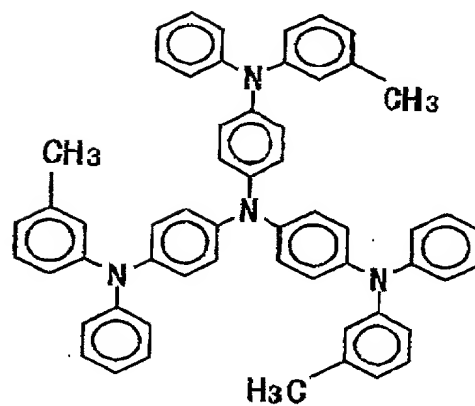


[57]


25

004727-672260

There are no particular limitation on the electron transporting material used for the electron transporting layer in the present invention, and any compound that is usually used as an electron transporting material can be used. Examples of such materials include, but not limited to, oxadiazole derivatives, such as 2-(4-biphenyl)-5-(4-t-butylphenyl)-1,3,4-oxadiazole [58] and bis{2-(4-t-butylphenyl)-1,3,4-oxadiazole}-m-phenylene [59], triazole derivatives such as compounds [60] and [61], and quinolinol based metallic complex such as compounds [62] to [65].

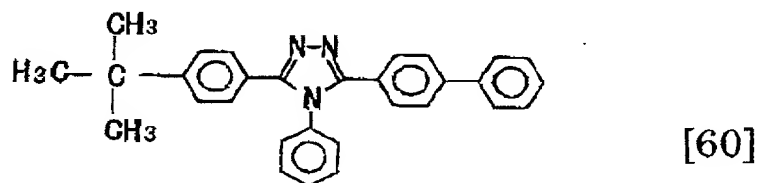


56

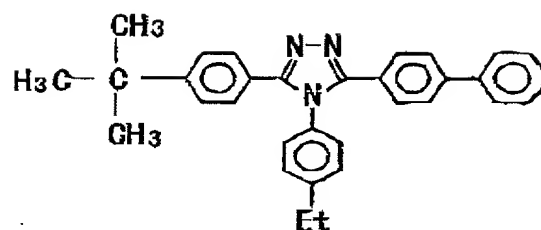


[61]

5




[62]

10

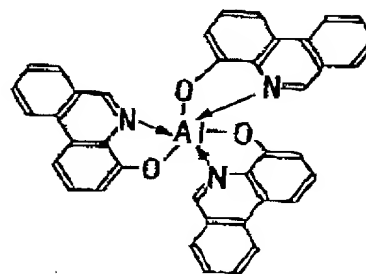


[63]

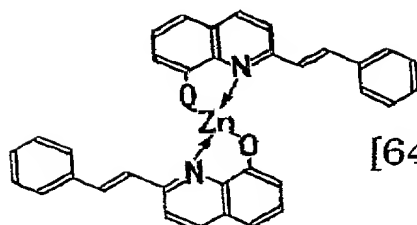

[64]

15

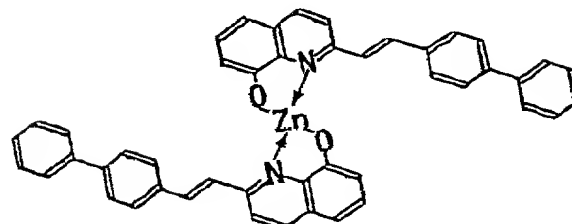

[65]

The anode of the organic EL device plays a role of injecting holes into the hole-transporting layer and that having a work function of 4.5 eV or greater is effective. Examples of materials for the anode include indium tin oxide (ITO), tin oxide (NESA), gold, silver, platinum and copper.

For the purpose of injecting electrons into the electron-transporting layer or the light emitting layer,

the cathode having a smaller work function is preferred. Examples for the material for the cathode include, but not limited to, indium, aluminum, magnesium, magnesium-indium alloy, magnesium-aluminum alloy, aluminum-lithium alloy, aluminum-scandium-lithium alloy, and magnesium-silver alloy.

Processes, such as vacuum evaporation or spin-coating, generally used for fabricating a conventional EL device can be used for the organic EL device of the present invention. Examples of such processes for forming the organic thin-film layer including the compounds represented by the general formulae [1] and [2] include, but not limited to, vacuum evaporation, molecular beam epitaxy (MBE), and dipping, spin-coating, casting, bar-coating or roll-coating of solutions wherein these compounds dissolved into solvents.

The organic layers in the organic EL device of the present invention may have any thickness. However, a preferable thickness generally resides between several nanometers and 1 micrometer. When the film is too thin, defects such as pin holes tend to occur. When the film is too thick, on the other hand, a high-applied voltage is required, which tends to deteriorate the efficiency .

25 Synthesis Example 1[illegible]

Synthesis of the compound [3] {1,7-di(2-adamantyloxy)-
3,9-bis(di-p-tolylamino)perylene

After 1,7-di(2-adamantyloxy)-3,9-dibromoperylene,
di-p-tolylamine, potassium carbonate, copper powder and
5 nitrobenzene were introduced in a reaction vessel, the
solution was stirred at 200°C for 40 hours. After the
reaction, the nitrobenzene was removed under vacuum
pressure, and chloroform was added and filtrated for
removal of inorganic compounds. The filtrate was
10 concentrated and purified with a conventional method. As
a result, the target compound [3] was obtained.

Synthesis Example 2

Synthesis of the compound [4] {1,7-di(2-adamantyloxy)-
15 3,9-bis(N-p-tolyl-N-4-(4-methylphenylvinyl)-
phenylamino)perylene

The target compound [4] was prepared in the same
process as Synthesis Example 1 except that N-4-(4-
methylphenylvinyl)phenyl-p-toluidine was used in place
20 of the di-p-tolylamine.

Synthesis Example 3

Synthesis of the compound [5] {1,7-di(2-adamantyloxy)-
3,9-bis(N-p-tolyl-N-4-(2,2-di-p-tolylvinyl)-
25 phenylamino)perylene

004427 572260

The target compound [5] was prepared in the same process as of Synthesis Example 1 except that N-4-(2,2-di-p-tolylvinyl)-phenyl-p-toluidine was used in place of the di-p-tolylamine.

5

Synthesis Example 4

Synthesis of the compound [6] {1,7-di-1-adamantyl-3,9-bis(di-p-tolylamino)perylene}

10 The target compound [6] was prepared in the same process as of Synthesis Example 1 except that 1,7-di-1-adamantyl-3,9-dibromoperylene was used in place of the 1,7-di(2-adamantyloxy)-3,9-dibromoperylene.

Synthesis Example 5

15 Synthesis of the compound [7] {1,7-di-1-adamantyl-3,9-bis[N-p-tolyl-N-4-(methylphenylvinyl)phenylamino]perylene}

20 The target compound [7] was prepared in the same process as Synthesis Example 2 except that 1,7-di-1-adamantyl-3,9-dibromoperylene was used in place of the 1,7-di(2-adamantyloxy)-3,9-dibromoperylene.

Synthesis Example 6

25 Synthesis of the compound [8] {1,7-di-1-adamantyl-3,9-bis[N-p-tolyl-N-4-(2,2-di-p-tolylvinyl)phenylamino]}

003749-14400

perylene}

The target compound [8] was prepared in the same process as Synthesis Example 3 except that 1,7-di-1-adamantyl-3,9-dibromoperylene was used in place of the 1,7-di(2-adamantyloxy)-3,9-dibromoperylene.

Synthesis Example 7

Synthesis of the compound [18] {1,7-di-*t*-butoxy- 3,9-bis(di-*p*-tolylamino)perylene}

10 The target compound [18] was prepared in the same process as Synthesis Example 1 except that 1,7-di-
t-butoxy-3,9-dibromoperylene was used in place of the
1,7-di(2-adamantyloxy)- 3,9-dibromoperylene.

15 Synthesis Example 8

Synthesis of the compound [19] {1,7-di-*t*-butoxy- 3,9-bis(*N*-*p*-tolyl-*N*-4-(4-methylphenylvinyl)phenylamino- perylene)

The target compound [19] was prepared in the
 20 same process as Synthesis Example 2 except that 1,7-di-
 t-butoxy-3,9-dibromoperylene was used in place of the
 1,7-di(2-adamantyloxy)- 3,9-dibromoperylene.

Synthesis Example 9

25 Synthesis of the compound [20] {1,7-di-*t*-butoxy- 3,9-

bis(N-p-tolyl-N-4-(2,2-di-p-tolylvinyl)phenylamino-
perylene)

The target compound [20] was prepared in the
same process as Synthesis Example 3 except that 1,7-di-
5 t-butoxy-3,9-dibromoperylene was used in place of the
1,7-di(2-adamantyloxy)-3,9-dibromoperylene.

Synthesis Example 10

10 Synthesis of the compound [24] {1,7-di-t-butoxy-3-(N-p-
tolyl-N-4-(4-methylphenylvinyl)phenylamino- perylene)

The target compound [24] was prepared in the
same process as Synthesis Example 8 except that 1,7-di-
t-butoxy-3-bromoperylene was used in place of 1,7-di-t-
butoxy-3,9-dibromoperylene.

15

Synthesis Example 11

Synthesis of the compound [26] {t-butylbenzo[a]perylene}

After t-butyl-7,14-dioxo-7,14-dihydrobenzo[a]-
perylene was treated with zinc powder in pyridine with a
20 conventional method, it was treated with 80%-acetic acid.
The product was purified with a conventional method. As
a result, the target compound [26] was obtained.

Synthesis Example 12

25 Synthesis of the compound [27], {bis-di-p-tolylamino}-t-

004427" 6776260

butylbenzo[a]perylene}

After the compound [26] was dissolved in dimethylformamide, two equivalences of N-bromosuccinimide was added and stirred at room
5 temperature. After the reaction, reaction mixture was washed with water, and the product was purified with a conventional method to prepare dibromo-t-butylbenzo[a]perylene. The compound was introduced in a reaction vessel together with di-p-tolylamine,
10 potassium carbonate, copper powder and nitrobenzene, and was stirred at the temperature of 200 °C for 40 hours. After the reaction, nitrobenzene was removed under vacuum pressure, and chloroform was added and filtrated for removal of inorganic compounds. The filtrate
15 was concentrated and purified with a conventional method. As a result, the target compound [27] was obtained.

Synthesis Example 13

20 Synthesis of the compound [28] {bis(N-p-tolyl-N-4-(4-methylphenylvinyl)phenylamino)-t-butylbenzo[a]perylene}

The target compound [28] was prepared in the same process as Synthesis Example 12 except that N-4-(4-methylphenylvinyl)phenyl-p-toluidine was used in place
25

of di-p-tolylamine.

Synthesis Example 14

Synthesis of the compound [29] {bis(N-p-tolyl-N-4-(2,2-di-
5 p-tolylvinyl)phenylamino)- t-butylbenzo[a]perylene

The target compound [29] was prepared in the same process as Synthesis Example 12 except that N-4-(2,2-di-p-tolylvinyl)phenyl-p-toluidine was used in place of di-p-tolylamine.

Synthesis Example 15

Synthesis of the compound [31] {1-adamantylbenzo[a]perylene}

The target compound [31] was prepared in the same process as Synthesis Example 11 except that 1-adamanyl-7,14-dioxo-7,14-dihydrobenzo- [a]perylene was used in place of the t-butyl-7,14-dioxo-7,14-dihydrobenzo[a]- perylene.

Synthesis Example 16

Synthesis of the compound [32] {bis(di-p-tolylamino-(1-adamantyl)benzo[a]perylene)}

The target compound [32] was prepared in accordance with the procedures of Synthesis Example 12
25 except that the compound [31] was used in place of the

compound [26].

Synthesis Example 17

Synthesis of the compound [33] {bis(N-p-tolyl-N-4-(4-
5 methylphenylvinyl)phenylamino)-
(1-adamantyl)benzo[a]perylene)

The target compound [33] was prepared in the same
process as Synthesis Example 16 except that N-4-(4-
methylphenylvinyl)phenyl-p-toluidine was used in place
10 of the di-p-tolylamine.

Synthesis Example 18

Synthesis of the compound [34] {bis(N-p-tolyl-N-4-(2,2-di-
p-tolylvinyl)phenylamino)-
15 (1-adamantyl)benzo[a]perylene)

The target compound [34] was prepared in the same
process as Synthesis Example 16 except that N-4-(2,3-di-
p-tolylvinyl)phenyl-p-toluidine was used in place of the
di-p-tolylamine.

20

Synthesis Example 19

Synthesis of the compound [42], {N-p-tolyl-N-4-(4-
methylphenylvinyl)phenylamino-t-
butylbenzo[a]perylene

25

After the compound [26] was dissolved in

004727" 672260

dimethylformamide, one equivalence of N-bromosuccinimide was added and stirred at room temperature. After the reaction, reaction mixture was washed with water, and the product was purified with a conventional method to prepare bromo-t-butylbenzo[a]perylene. The compound was introduced in a reaction vessel together with N-4- (4-methylphenylvinyl)phenyl-p-tolylamine, potassium carbonate, copper powder and nitrobenzene, and was stirred at the temperature of 200 °C and 40 hours. After the reaction, the nitrobenzene was removed under vacuum pressure, and chloroform was added and filtrated for removal of inorganic compounds. The filtrate was concentrated and purified with a conventional method. As a result, the target compound [42] was obtained.

Synthesis Example 20

Synthesis of the compound [36]
{phenoxybenzo[a]perylene}

The target compound [36] was prepared the same process as Synthesis Example 11 except that phenoxy-7,14-dioxo-7,14-dihydrobenzo[a]- perylene was used in place of the t-butyl-7,14-dioxo-7,14-dihydrobenzo[a]-perylene.

Synthesis Example 21

Synthesis of the compound [40] {N-p-tolyl-N-4-(4-methylphenylvinyl)phenylamino-phenyloxybenzo[a]perylene}

- 5 The target compound [40] was prepared the same process as Synthesis Example 19 except that the compound [36] was used in place of the compound [26].

Synthesis Example 22

- 10 Synthesis of the compound [48] {di-t-butoxybenzo[a]perylene}

 The target compound [48] was prepared the same process as Synthesis Example 11 except that di-t-butyl-7,14-dioxo-7,14-dihydrobenzo[a]-perylene was used in
15 place of the t-butyl-7,14-dioxo-7,14-dihydrobenzo[a]-perylene.

Synthesis Example 23

- 20 Synthesis of the compound [51] {bis(N-p-tolyl-N-4-(2,2-di-p-tolylvinyl)phenylamino)- di-t-butoxybenzo[a]perylene}

 The target compound [51] was prepared the same process as Synthesis Example 14 except that the compound [48] was used in place of the compound [26].

- 25 Examples in that the compounds of the present

invention used in the light-emitting layer (Examples 1 to 22, 27 to 30, 35 to 37, 42 to 67, 72 to 75 and 80 to 82), in the light-emitting layer with the hole transporting material (Examples 23 to 26 and 68 to 71), in the light-emitting layer with the electron transporting (Examples 31 to 34, 38, 76 to 79 and 83), in the hole transporting layer (Examples 39, 40, 84 and 85), in the electron transporting layer (Examples 41, 86 and 87) will be described below. Comparative Examples will also be described below.

Example 1

An organic EL device in accordance with Example 1 of the present invention had a structure shown in Fig. 1. The organic EL device had a structure of anode 12/light-emitting layer 14/cathode 16 overlying a glass substrate 11, and was fabricated in the following manner.

An ITO film was formed on the glass substrate 11 by sputtering so that the ITO film had a sheet resistance of 20 ohm/ \square . The thus formed ITO film acts as anode 12. Thereafter, the compound [3] was vacuum deposited on the anode to form the light emitting layer 14 having a thickness of 40 nm. Next, magnesium-silver alloy was vacuum deposited to form the cathode 16 having a film thickness of 200 nm. Thus there was completed, the

organic EL device in accordance with Example 1.

When a dc voltage of 5 V was applied to this organic EL device, light emission of 430cd/m² was obtained.

5 Example 2

An organic EL device of Example 2 of the present invention was fabricated similarly to Example 1 except that the compound [4] was used as the light-emitting material.

10 When a dc voltage of 5 V was applied to this organic EL device, light emission of 510cd/m² was obtained.

Example 3

15 An organic EL device of Example 3 was fabricated similarly to Example 1 except that the compound [5] was used as the light-emitting material.

When a dc voltage of 5 V was applied to this organic EL device, light emission of 560cd/m² was obtained.

20 Example 4

An organic EL device of Example 3 was fabricated similarly to Example 1 except that the compound [6] was used as the light-emitting material.

25 When a dc voltage of 5 V was applied to this organic EL device, light emission of 400cd/m² was obtained.

Example 5

An organic EL device of Example 3 was fabricated similarly to Example 1 except that the compound [7] was
5 used as the light-emitting material.

When a dc voltage of 5 V was applied to this organic EL device, light emission of 460cd/m² was obtained.

Example 6

10 An organic EL device of Example 6 was fabricated similarly to Example 1 except that the compound [8] was used as the light-emitting material.

When a dc voltage of 5 V was applied to this organic EL device, light emission of 520cd/m² was obtained.

15

Example 7

An organic EL device of Example 7 was fabricated similarly to Example 1 except that the compound [18] was used as the light-emitting material.

20

When a dc voltage of 5 V was applied to this organic EL device, light emission of 430cd/m² was obtained.

Example 8

25 An organic EL device of Example 8 was fabricated similarly to Example 1 except that the compound [19]

004737-572260

was used as the light-emitting material.

When a dc voltage of 5 V was applied to this organic EL device, light emission of 510cd/m² was obtained.

5 Example 9

An organic EL device of Example 9 was fabricated similarly to Example 1 except that the compound [20] was used as the light-emitting material.

When a dc voltage of 5 V was applied to this organic
10 EL device, light emission of 580cd/m² was obtained.

Example 10

An organic EL device of Example 10 having the structure shown in Fig.1 was fabricated in the following manner.

An ITO film was formed on the glass substrate 11 by sputtering so that the ITO film had a sheet resistance of 20 ohm/□. The thus formed ITO film acted as anode 12. Thereafter, the compound [5] was formed thereon as the light-emitting layer 14 having a film thickness of 40 nm by a spin-coating method using a chloroform solution. Next, magnesium-silver alloy was vacuum deposited to form the cathode 16 having a film thickness of 200 nm. Thus there was completed the organic EL in accordance with Example 10.

When a dc voltage of 5 V was applied to this organic EL device, light emission of 160cd/m² was obtained.

Example 11

5 An organic EL device of Example 11 had a structure shown in Fig. 2. The organic EL device had a structure of anode 12/hole transporting layer 13/light-emitting layer 14/electron transport layer 15/cathode 16 overlying the glass substrate 11, and was fabricated in the following
10 manner.

An ITO film was formed on the glass substrate 11 by sputtering so that the ITO film had a sheet resistance of 20 ohm/□. The thus formed ITO film acted as anode 12. Thereafter, N, N'-diphenyl-N,N'-bis(3-methylphenyl)-
15 1,1'-biphenyl- 4,4'-diamine [53] was vacuum deposited to form the hole transporting layer 13 having a film thickness of 50 nm. The compound [3] was vacuum deposited thereon to form as the as the light-emitting layer 14 having a film thickness of 40 nm. Then, 2-(4-
20 biphenylyl)-5-(4-t-butylphenyl)- 1,3,4-oxadiazole [58] was vacuum deposited thereon as the electron transporting layer 15 having a film thickness of 20 nm. Next, magnesium-silver alloy was vacuum deposited to form the cathode 16 having a film thickness of 200 nm. Thus
25 there was completed the organic EL in accordance with

Example 11.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 2300cd/m² was obtained.

5

Example 12

An organic EL device of Example 12 was fabricated similarly to Example 11 except that the compound [4] was used as the light-emitting material.

10

When a dc voltage of 10 V was applied to this organic EL device, light emission of 3010cd/m² was obtained.

Example 13

15

An organic EL device of Example 13 was fabricated similarly to Example 11 except that the compound [5] was used as the light-emitting material.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 4100cd/m² was obtained.

20

Example 14

An organic EL device of Example 14 was fabricated similarly to Example 11 except that the compound [6] was used as the light-emitting material.

25

When a dc voltage of 10 V was applied to this organic EL device, light emission of 2130cd/m² was obtained.

5 Example 15

An organic EL device of Example 15 was fabricated similarly to Example 11 except that the compound [7] was used as the light-emitting material.

When a dc voltage of 10 V was applied to this
10 organic EL device, light emission of 3100cd/m² was
obtained.

Example 16

An organic EL device of Example 16 was fabricated similarly to Example 11 except that the compound [8] was used as the light-emitting material.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 4320cd/m² was obtained.

Example 17

An organic EL device of Example 17 was fabricated similarly to Example 11 except that the compound [24] was used as the light-emitting material.

25 When a dc voltage of 10 V was applied to this

organic EL device, light emission of 2450cd/m^2 was obtained.

Example 18

5 An organic EL device of Example 18 was fabricated similarly to Example 11 except that the compound [19] was used as the light-emitting material.

10 When a dc voltage of 10 V was applied to this organic EL device, light emission of 2970cd/m^2 was obtained.

Example 19

15 An organic EL device of Example 19 was fabricated similarly to Example 11 except that the compound [20] was used as the light-emitting material.

 When a dc voltage of 10 V was applied to this organic EL device, light emission of 4330cd/m^2 was obtained.

20 Example 20

 An organic EL device of Example 20 was fabricated similarly to Example 11 except that N,N'-diphenyl-N,N'-bis(3-methylphenyl)-1,1'-biphenyl- 4,4'-diamine [54] was used in the hole transporting layer 13 and bis{2-(4-t-
25 butylphenyl)-1,3,4-oxadiazole}-m- phenylene [59] was

used in the electron transporting layer 15.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 5120cd/m² was obtained.

5

Example 21

An organic EL device of Example 21 was fabricated similarly to Example 11 except that the star burst type molecule [55] was used in the hole transporting layer 13, the compound [5] was used in the light-emitting layer 14 and the quinolinol based metal complex [62] was used in the electron transport layer 15.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 4580cd/m² was obtained.

15

Example 22

An organic EL device of Example 22 was fabricated similarly to Example 11 except that the star burst type molecule [56] was used in the hole transporting layer 13, the compound [5] was used in the light-emitting layer 14 and the quinolinol based metal complex [63] was used in the electron transporting layer 15.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 5130cd/m² was

25

obtained.

Example 23

An organic EL device of Example 23 was fabricated
5 similarly to Example 11 except that a thin film having a
thickness of 50 nm formed by co-evaporation of N,N'-
diphenyl-N,N'-bis(3-methylphenyl)-1,1'-biphenyl- 4,4'-
diamine [54] and the compound [5] in a weight ratio of
1:10 was used as the light-emitting layer 14.

10 When a dc voltage of 10 V was applied to this
organic EL device, light emission of 4250cd/m² was
obtained.

Example 24

15 An organic EL device of Example 24 was fabricated
similarly to Example 23 except that the compound [4]
was used in place of the compound [5].

When a dc voltage of 10 V was applied to this
organic EL device, light emission of 3280cd/m² was
20 obtained.

Example 25

An organic EL device of Example 25 was fabricated
similarly to Example 23 except that the compound [18]
25 was used in place of the compound [5].

When a dc voltage of 10 V was applied to this organic EL device, light emission of 4370cd/m² was obtained.

5 Example 26

An organic EL device of Example 26 was fabricated similarly to Example 23 except that the compound [20] was used in place of the compound [5].

When a dc voltage of 10 V was applied to this
10 organic EL device, light emission of 5400cd/m² was obtained.

Example 27

An organic EL device of Example 27 had a structure
15 shown in Fig. 3. The organic EL device had a structure of anode 12/hole transporting layer 13/light-emitting layer 14/cathode 16 overlying the glass substrate 11, and was fabricated in the following manner.

An ITO film was formed on the glass substrate 11 by
20 sputtering so that the ITO film had a sheet resistance of 20 ohm/□. The thus formed ITO film acted as anode 12. Thereafter, N,N'-diphenyl-N,N'-bis(1-naphthyl)-1,1'-biphenyl-4,4'-diamine [54] was vacuum deposited to form the hole transporting layer 13 having a film thickness of
25 50 nm. The compound [3] was vacuum deposited thereon

to form the light-emitting layer 14 having a film thickness of 40 nm. Next, magnesium-silver alloy was vacuum deposited to form the cathode 16 having a film thickness of 200 nm. Thus there was completed the organic EL in accordance with Example 27.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 1670cd/m² was obtained.

10 Example 28

An organic EL device of Example 28 was fabricated similarly to Example 27 except that the compound [5] was used in place of the compound [3].

When a dc voltage of 10 V was applied to this organic EL device, light emission of 2960cd/m² was obtained.

Example 29

An organic EL device of Example 29 was fabricated similarly to Example 27 except that the compound [7] was used in place of the compound [3].

When a dc voltage of 10 V was applied to this organic EL device, light emission of 1980cd/m² was obtained.

Example 30

An organic EL device of Example 30 was fabricated similarly to Example 27 except that the compound [20] was used in place of the compound [3].

5 When a dc voltage of 10 V was applied to this organic EL device, light emission of 3150cd/m² was obtained.

Example 31

10 An organic EL device of Example 31 was fabricated similarly to Example 27 except that a thin film having a thickness of 50 nm formed by co-evaporation of the quinolinol based metal complex [62] and the compound [3] in a weight ratio of 20:1 was used as the light-emitting
15 layer 14.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 2360cd/m² was obtained.

20 Example 32

An organic EL device of Example 32 was fabricated similarly to Example 31 except that the compound [5] was used in place of the compound [3].

25 When a dc voltage of 10 V was applied to this organic EL device, light emission of 3060cd/m² was

obtained.

Example 33

An organic EL device of Example 33 was fabricated
5 similarly to Example 31 except that the compound [19]
was used in place of the compound [3].

When a dc voltage of 10 V was applied to this
organic EL device, light emission of 2610cd/m² was
obtained.

Example 34

An organic EL device of Example 34 was fabricated
similarly to Example 31 except that the compound [8]
was used in place of the compound [3].

15 When a dc voltage of 10 V was applied to this
organic EL device, light emission of 3110cd/m² was
obtained.

Example 35

20 An organic EL device of Example 35 had a structure
shown in Fig. 4. The organic EL device had a structure of
anode 12/light-emitting layer 14/electron transporting
layer 15/cathode 16 overlying the glass substrate 11, and
was fabricated in the following manner.

25 An ITO film was formed on the glass substrate 11 by

00447 67E/E/6D

sputtering so that the ITO film had a sheet resistance of 20 ohm/□. The thus formed ITO film acted as anode 12. Thereafter, the compound [5] was vacuum deposited to form the light-emitting layer 14 having a film thickness of 50 nm. The triazole derivative [60] was vacuum deposited thereon to form the electron transmitting layer 15 having a film thickness of 50 nm. Next, magnesium-silver alloy was vacuum deposited to form the cathode 16 having a film thickness of 200 nm. Thus there was completed the organic EL in accordance with Example 35.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 1790cd/m² was obtained.

15 Example 36

An organic EL device of Example 36 was fabricated similarly to Example 35 except that the compound [8] was used in place of the compound [5].

When a dc voltage of 10 V was applied to this organic EL device, light emission of 1910cd/m² was obtained.

Example 37

An organic EL device of Example 37 was fabricated similarly to Example 35 except that the compound [19]

was used in place of the compound [5].

When a dc voltage of 10 V was applied to this organic EL device, light emission of 1610cd/m² was obtained.

5

Example 38

An organic EL device of Example 38 was fabricated similarly to Example 27 except that the N,N'-diphenyl-N,N'-bis(3-methylphenyl)-1,1'-biphenyl- 4,4'-diamine [53] was used in the hole transporting layer 13, and a thin film formed by co-evaporation of the quinolinol based metal complex [64] and the compound [19] in a weight ratio of 20:1 was used in the light-emitting layer 14.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 2430cd/m² was obtained.

Example 39

An organic EL device of Example 39 was fabricated similarly to Example 11 except that the compound [3] was used in the hole transporting layer 13, and the quinolinol based metal complex [64] was used in the light-emitting layer 14.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 1630cd/m² was

obtained.

Example 40

An organic EL device of Example 40 was fabricated similarly to Example 39 except that the compound [20] was used in the hole transporting layer 13.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 1970cd/m² was obtained.

10

Example 41

An organic EL device of Example 41 was fabricated similarly to Example 11 except that the compound [6] was used in the electron transport layer 15, and the quinolinol
15 based metal complex [62] was used in the light-emitting layer 14.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 810cd/m² was obtained.

20

Comparative Example 1

An organic EL device of Comparative Example 1 was fabricated similarly to Example 11 except that 3,9-bis(di-p-tolylamino)perylene was used in the light-emitting layer 14.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 1600cd/m² was obtained.

5 Comparative Example 2

An organic EL device of Comparative Example 2 was fabricated similarly to Example 11 except that 3,9-bis(N-4-(4-methylphenylvinyl)phenyl-N-p-tolylamino)perylene was used in the light-emitting layer
10 14.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 2000cd/m² was obtained.

15 Example 42

An organic EL device of Example 42 was fabricated similarly to Example 1 except that the compound [26] was used in place of the compound [3].

When a dc voltage of 5 V was applied to this organic
20 EL device, light emission of 150cd/m² was obtained.

Example 43

An organic EL device of Example 43 was fabricated similarly to Example 42 except that the compound [27]
25 was used as the light-emitting material.

004121"6FEZE60

When a dc voltage of 5 V was applied to this organic EL device, light emission of 150cd/m² was obtained.

Example 44

5 An organic EL device of Example 44 was fabricated similarly to Example 42 except that the compound [28] was used as the light-emitting material.

When a dc voltage of 5 V was applied to this organic EL device, light emission of 250cd/m² was obtained.

10

Example 45

An organic EL device of Example 45 was fabricated similarly to Example 42 except that the compound [29] was used as the light-emitting material.

15

When a dc voltage of 5 V was applied to this organic EL device, light emission of 290cd/m² was obtained.

Example 46

20 An organic EL device of Example 46 was fabricated similarly to Example 42 except that the compound [31] was used as the light-emitting material.

When a dc voltage of 5 V was applied to this organic EL device, light emission of 170cd/m² was obtained.

25 Example 47

DocId: 67423450

An organic EL device of Example 47 was fabricated similarly to Example 42 except that the compound [32] was used as the light-emitting material.

When a dc voltage of 5 V was applied to this organic
5 EL device, light emission of 200cd/m² was obtained.

Example 48

An organic EL device of Example 48 was fabricated similarly to Example 42 except that the compound [33] was used as the light-emitting material.

When a dc voltage of 5 V was applied to this organic EL device, light emission of 240cd/m² was obtained.

Example 49

15 An organic EL device of Example 49 was fabricated similarly to Example 42 except that the compound [34] was used as the light-emitting material.

When a dc voltage of 5 V was applied to this organic EL device, light emission of 280cd/m² was obtained.

Example 50

An organic EL device of Example 50 was fabricated similarly to Example 42 except that the compound [36] was used as the light-emitting material.

25 When a dc voltage of 5 V was applied to this organic

EL device, light emission of 160cd/m² was obtained.

Example 51

An organic EL device of Example 51 was fabricated similarly to Example 42 except that the compound [40] was used as the light-emitting material.

When a dc voltage of 5 V was applied to this organic EL device, light emission of 200cd/m² was obtained.

10 Example 52

An organic EL device of Example 52 was fabricated similarly to Example 42 except that the compound [42] was used as the light-emitting material.

When a dc voltage of 5 V was applied to this organic
15 EL device, light emission of 190cd/m² was obtained.

Example 53

An organic EL device of Example 53 was fabricated similarly to Example 10 except that the compound [29] was used in place of the compound [5].

When a dc voltage of 5 V was applied to this organic EL device, light emission of 80cd/m² was obtained.

Example 54

25 An organic EL device of Example 54 was fabricated

similarly to Example 11 except that the compound [26] was used in place of the compound [5].

When a dc voltage of 10 V was applied to this organic EL device, light emission of 900cd/m² was
5 obtained.

Example 55

An organic EL device of Example 55 was fabricated similarly to Example 54 except that the compound [27]
10 was used as the light-emitting material.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 2600cd/m² was obtained.

15 Example 56

An organic EL device of Example 56 was fabricated similarly to Example 54 except that the compound [28] was used as the light-emitting material.

When a dc voltage of 10 V was applied to this
20 organic EL device, light emission of 3100cd/m² was obtained.

Example 57

An organic EL device of Example 57 was fabricated
25 similarly to Example 54 except that the compound [29]

was used as the light-emitting material.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 3700cd/m² was obtained.

5

Example 58

An organic EL device of Example 58 was fabricated similarly to Example 54 except that the compound [31] was used as the light-emitting material.

10 The EL device thus fabricated exhibited a luminescence of 930 cd/m² at an applied DC voltage of 10 volts.

Example 59

¹⁵ An organic EL device of Example 59 was fabricated similarly to Example 54 except that the compound [32] was used as the light-emitting material.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 2300cd/m² was
20 obtained.

Example 60

An organic EL device of Example 60 was fabricated similarly to Example 54 except that the compound [33] was used as the light-emitting material.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 2980cd/m² was obtained.

5 Example 61

An organic EL device of Example 61 was fabricated similarly to Example 54 except that the compound [34] was used as the light-emitting material.

10 When a dc voltage of 10 V was applied to this organic EL device, light emission of 3600cd/m² was obtained.

Example 62

15 An organic EL device of Example 62 was fabricated similarly to Example 54 except that the compound [48] was used as the light-emitting material.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 670cd/m² was obtained.

20

Example 63

An organic EL device of Example 63 was fabricated similarly to Example 54 except that the compound [51] was used as the light-emitting material.

25

When a dc voltage of 10 V was applied to this

0973719-121400

organic EL device, light emission of 1830cd/m^2 was obtained.

Example 64

5 An organic EL device of Example 64 was fabricated similarly to Example 54 except that the compound [42] was used as the light-emitting material.

10 When a dc voltage of 10 V was applied to this organic EL device, light emission of 1910cd/m^2 was obtained.

Example 65

15 An organic EL device of Example 65 was fabricated similarly to Example 54 except that the N,N'-diphenyl-N,N'-bis(1-naphthyl)-1,1'-biphenyl-4,4'- diamine [54] was used as the hole transporting material and the bis{2-(4-t-butylphenyl)-1,3,4-oxadiazole}- m-phenylene [59] was used as the electron transporting material.

20 When a dc voltage of 10 V was applied to this organic EL device, light emission of 850cd/m^2 was obtained.

Example 66

25 An organic EL device of Example 66 was fabricated similarly to Example 54 except that the star-burst type

004727 67E2E260

molecule [55] was used as the hole transporting material, the compound [29] was used as the light-emitting material and the quinolinol based metal complex [62] was used as the electron transporting material.

- 5 When a dc voltage of 10 V was applied to this organic EL device, light emission of 4320cd/m² was obtained.

Example 67

- 10 An organic EL device of Example 67 was fabricated similarly to Example 54 except that the star-burst type molecule [56] was used as the hole transporting material, the compound [42] was used as the light-emitting material and the quinolinol based metal complex [63] was
15 used as the electron transporting material.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 2060cd/m² was obtained.

20 Example 68

- An organic EL device of Example 68 was fabricated similarly to Example 54 except that a thin film having a thickness of 50 nm formed by co-evaporation of N,N'-diphenyl-N,N'-bis(3-methylphenyl)-1,1'-biphenyl- 4,4'-
25 diamine [54] and the compound [28] in a weight ratio of

1:10 was used as the light-emitting layer 14.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 3470cd/m² was obtained.

5

Example 69

An organic EL device of Example 69 was fabricated similarly to Example 68 except that the compound [32] was used in place of the compound [28].

10

When a dc voltage of 10 V was applied to this organic EL device, light emission of 2510cd/m² was obtained.

Example 70

15

An organic EL device of Example 70 was fabricated similarly to Example 68 except that the compound [34] was used in place of the compound [28].

20

When a dc voltage of 10 V was applied to this organic EL device, light emission of 3720cd/m² was obtained.

Example 71

25

An organic EL device of Example 71 was fabricated similarly to Example 68 except that the compound [40] was used in place of the compound [28].

When a dc voltage of 10 V was applied to this organic EL device, light emission of 2010cd/m² was obtained.

5 Example 72

An organic EL device of Example 72 was fabricated similarly to Example 27 except that the compound [27] was used in place of the compound [3].

10 When a dc voltage of 10 V was applied to this organic EL device, light emission of 1770cd/m² was obtained.

Example 73

15 An organic EL device of Example 73 was fabricated similarly to Example 72 except that the compound [26] was used in place of the compound [27].

When a dc voltage of 10 V was applied to this organic EL device, light emission of 820cd/m² was obtained.

20

Example 74

An organic EL device of Example 74 was fabricated similarly to Example 72 except that the compound [33] was used in place of the compound [27].

25

When a dc voltage of 10 V was applied to this

organic EL device, light emission of 2270cd/m^2 was obtained.

Example 75

5 An organic EL device of Example 75 was fabricated similarly to Example 72 except that the compound [40] was used in place of the compound [27].

When a dc voltage of 10 V was applied to this organic EL device, light emission of 1540cd/m^2 was
10 obtained.

Example 76

An organic EL device of Example 76 was fabricated similarly to Example 72 except that a thin film having a
15 thickness of 50 nm formed by co-evaporation of the quinolinol based metal complex [62] and the compound [28] in a weight ratio of 20:1 was used as the light-emitting layer 14.

When a dc voltage of 10 V was applied to this
20 organic EL device, light emission of 2360cd/m^2 was obtained.

Example 77

An organic EL device of Example 77 was fabricated
25 similarly to Example 76 except that the compound [31]

was used in place of the compound [28].

When a dc voltage of 10 V was applied to this organic EL device, light emission of 790cd/m² was obtained.

5

Example 78

An organic EL device of Example 78 was fabricated similarly to Example 76 except that the compound [34] was used in place of the compound [28].

10

When a dc voltage of 10 V was applied to this organic EL device, light emission of 3020cd/m² was obtained.

Example 79

15

An organic EL device of Example 79 was fabricated similarly to Example 76 except that the compound [51] was used in place of the compound [28].

20

When a dc voltage of 10 V was applied to this organic EL device, light emission of 1870cd/m² was obtained.

Example 80

25

An organic EL device of Example 80 was fabricated similarly to Example 35 except that the compound [26] was used in place of the compound [5].

When a dc voltage of 10 V was applied to this organic EL device, light emission of 990cd/m² was obtained.

5 Example 81

An organic EL device of Example 81 was fabricated similarly to Example 80 except that the compound [32] was used in place of the compound [26].

10 When a dc voltage of 10 V was applied to this organic EL device, light emission of 2020cd/m² was obtained.

Example 82

15 An organic EL device of Example 82 was fabricated similarly to Example 80 except that the compound [28] was used in place of the compound [26].

When a dc voltage of 10 V was applied to this organic EL device, light emission of 2600cd/m² was obtained.

20

Example 83

25 An organic EL device of Example 83 was fabricated similarly to Example 72 except that the N,N'-diphenyl-N,N'-bis(3-methylphenyl)-1,1'-biphenyl- 4,4'-diamine [53] was used as the hole transporting layer 13, and a thin

004722167E260

film by co-evaporation of the quinolinol based metal complex [64] and the compound [33] in a weight ratio of 20:1 was used as the light-emitting layer 14.

When a dc voltage of 10 V was applied to this
5 organic EL device, light emission of 2250cd/m² was obtained.

Example 84

0044T-4400
10 An organic EL device of Example 84 was fabricated similarly to Example 54 except that the compound [29] was used in the hole transporting layer 13, the quinolinol based metal complex [64] was used in the light-emitting layer 14.

When a dc voltage of 10 V was applied to this
15 organic EL device, light emission of 1970cd/m² was obtained.

Example 85

20 An organic EL device of Example 85 was fabricated similarly to Example 84 except that the compound [32] was used in the hole transporting layer 13.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 1630cd/m² was obtained.

Example 86

An organic EL device of Example 86 was fabricated similarly to Example 54 except that the compound [26] was used in the electron transport layer 15 and the quinolinol based metal complex [62] was used in the light-emitting layer 14.

When a dc voltage of 10 V was applied to this organic EL device, light emission of 730cd/m² was obtained.

Example 87

An organic EL device of Example 87 was fabricated similarly to Example 86 except that the compound [29] was used in place of the compound [26].

15 When a dc voltage of 10 V was applied to this
organic EL device, light emission of 690cd/m² was
obtained.

Comparative Example 3

20 An organic EL device of Comparative Example 3 was fabricated similarly to Example 54 except that bis(di-p-tolylamino)benzoperylene was used in the light-emitting layer 14.

When a dc voltage of 10 V was applied to this
 25 organic EL device, light emission of 1800cd/m² was

Figure 1 consists of six vertically stacked line graphs, labeled (a) through (f). Each graph plots a physiological parameter against time (0 to 10 minutes). The y-axis for all graphs ranges from 0 to 100. The x-axis for all graphs ranges from 0 to 10 minutes. The graphs show a baseline period followed by a 10-minute intervention period. The parameters are: (a) Heart rate (b/min), (b) Blood pressure (mmHg), (c) Cardiac output (l/min), (d) Stroke volume (ml), (e) Stroke volume index (ml/m²), and (f) Stroke volume index (ml/m²). The graphs show that heart rate, blood pressure, and cardiac output increase during the intervention period, while stroke volume and stroke volume index remain relatively stable.

obtained.

Comparative Example 4

5 An organic EL device of Comparative Example 4 was fabricated similarly to Example 54 except that (4-(4-methylphenylvinyl)phenyl-p-tolylamino)benzo[a]-perylene was used in the light-emitting layer 14.

10 When a dc voltage of 10 V was applied to this organic EL device, light emission of 2000cd/m² was obtained.

15 Since the above embodiments are described only for examples, the present invention is not limited to the above embodiments and various modifications or alterations can be easily made therefrom by those skilled in the art without departing from the scope of the present invention.

UNITED STATES PATENT AND TRADEMARK OFFICE
DOCUMENT CLASSIFICATION BARCODE SHEET




Claims

5

WHAT IS CLAIMED IS:

1. An organic electroluminescent (EL) device comprising an anode, a cathode, and one or more organic thin-film layers including a light-emitting layer sandwiched between the anode and the cathode, the organic thin-film layers including, either singly or as a mixture, a perylene compound represented by a general formula [1] as follows:

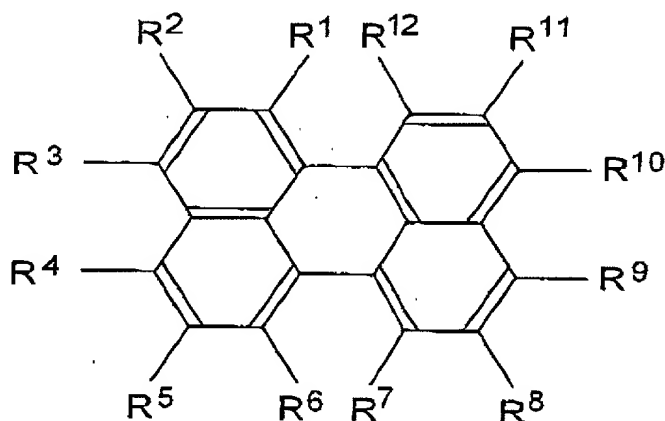

wherein each of R^1 to R^{12} independently represents hydrogen atom, halogen atom, hydroxyl group, substituted or non-substituted amino group, nitro group, cyano group, substituted or non-substituted alkyl group, substituted or non-substituted alkenyl group, substituted or non-substituted styryl group, substituted or non-substituted cycloalkyl group, substituted or non-

15 substituted alkoxy group, substituted or non-substituted
aromatic hydrocarbon group, substituted or non-
substituted aromatic heterocyclic group, substituted or
non-substituted aralkyl group or substituted or non-
substituted aryloxy group; any two of R^1 to R^{12} may form
20 a ring; however, at least one of R^1 to R^{12} is diarylamino
group represented by $-NAr^1Ar^2$ (each of Ar^1 and Ar^2
represents non-substituted aromatic hydrocarbon group
or substituted or non-substituted aromatic heterocyclic
group), and at least one of R^1 to R^{12} other than the
25 diarylamino group is a group with steric hindrance for
suppressing aggregation of molecules.

2. The organic EL device as defined in claim 1,
wherein at least one of A^1 and Ar^2 has substituted or non-
substituted styryl group as a substituent.

3. The organic EL device as defined in claim 1,
wherein the organic thin-film layers have at least a light-
emitting layer including the compound represented by
the general formula [1] either singly or as a mixture.

4. The organic EL device as defined in claim 1,
wherein the organic thin-film layers have at least a hole
transporting layer including the compound represented


by the general formula [1] either singly or as a mixture.

5 5. The organic EL device as defined in claim 1, wherein the organic thin-film layers have at least an electron transporting layer including the compound represented by the general formula [1] either singly or as a mixture.

00442T-674260
5 6. The organic EL device as defined in claim 1, wherein the group with steric hindrance included in the general formula [1] is the substituted or non-substituted alkyl group, the substituted or non-substituted cycloalkyl group, the substituted or non-substituted alkoxy group, the substituted or non-substituted aromatic hydrocarbon group, the substituted or non-substituted aromatic heterocyclic group, the substituted or non-substituted aralkyl group or the substituted or non-substituted aryloxy group.
10

7. An organic EL device comprising an anode, a cathode, and one or more organic thin-film layers including a light-emitting layer sandwiched between the anode and the cathode, the organic thin-film layers
5 including, either singly or as a mixture, a benzoperylene compound represented by a general formula [2] as

follows:

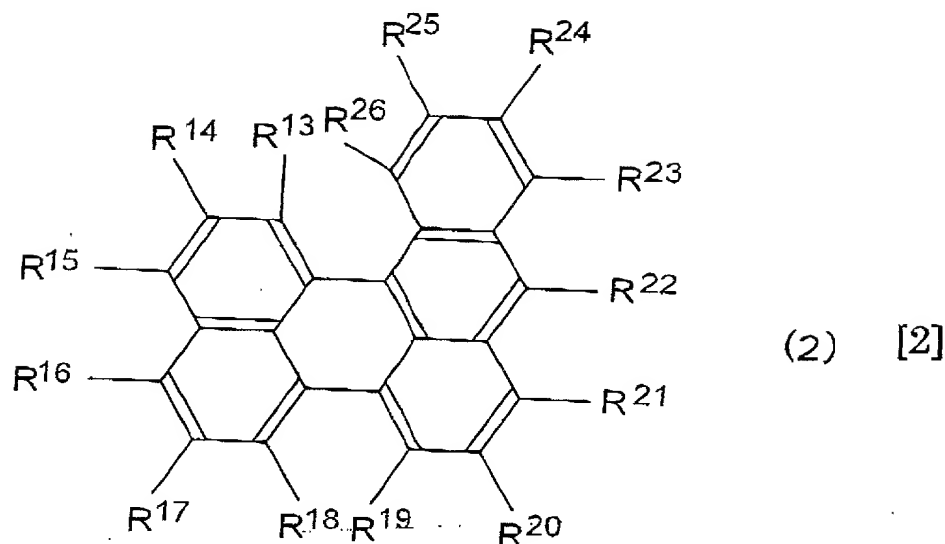

wherein each of R^{13} to R^{26} independently represents hydrogen atom, halogen atom, hydroxyl group, substituted or non-substituted amino group, nitro group, cyano group, substituted or non-substituted alkyl group, substituted or non-substituted alkenyl group, substituted or non-substituted styryl group, substituted or non-substituted cycloalkyl group, substituted or non-substituted alkoxy group, substituted or non-substituted aromatic hydrocarbon group, substituted or non-substituted aromatic heterocyclic group, substituted or non-substituted aralkyl group or substituted or non-substituted aryloxy group; any two of R^{13} to R^{26} may form a ring; and at least one of R^1 to R^{14} is a group with steric hindrance for suppressing aggregation of molecules.

8. The organic EL device as defined in claim 7, wherein at least one of R^{13} to R^{26} is diarylamino group represented by $-NAr^1Ar^2$ (each of Ar^1 and Ar^2 represents non-substituted aromatic hydrocarbon group or substituted or non-substituted aromatic heterocyclic group), and the group with steric hindrance is other than the diarylamino group.

9. The organic EL device as defined in claim 8, wherein at least one of Ar^1 and Ar^2 has substituted or non-substituted styryl group as a substituent.

10. The organic EL device as defined in claim 7, wherein the organic thin-film layers have at least a light-emitting layer including the compound represented by the general formula [2] either singly or as a mixture.

11. The organic EL device as defined in claim 7, wherein the organic thin-film layers have at least a hole transporting layer including the compound represented by the general formula [2] either singly or as a mixture.

12. The organic EL device as defined in claim 7, wherein the organic thin-film layers have at least an electron transporting layer including the compound

00737319-121400

represented by the general formula [2] either singly or as
5 a mixture.

13. The organic EL device as defined in claim 1,
wherein the group with steric hindrance included in the
general formula [2] is the substituted or non-substituted
alkyl group, the substituted or non-substituted cycloalkyl
5 group, the substituted or non-substituted alkoxy group,
the substituted or non-substituted aromatic hydrocarbon
group, the substituted or non-substituted aromatic
heterocyclic group, the substituted or non-substituted
aralkyl group or the substituted or non-substituted
10 aryloxy group.

00737349-121400

UNITED STATES PATENT AND TRADEMARK OFFICE
DOCUMENT CLASSIFICATION BARCODE SHEET




Abstract

6

ABSTRACT OF THE DISCLOSURE

An organic EL device comprising an anode, a cathode, and one or more organic thin-film layers having a light-emitting layer sandwiched between the anode and the cathode, the organic thin-film layers including, either singly or as a mixture, a perylene compound represented by a general formula [1] or a benzoperylene compound represented by a general formula [2].

[1]

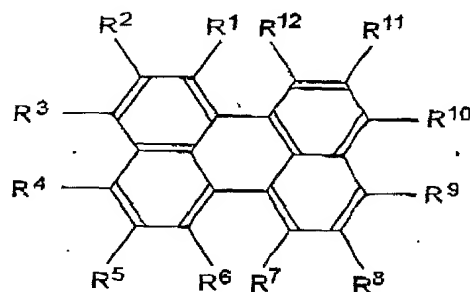

[2]

